



Homebuyer's Manual

Homes Closed on or After 01/31/2026

RECEIPT OF HOMEBUYER'S MANUAL AT SALE

I/WE HAVE RECEIVED THE 'HOMEBUYERS MANUAL" WHICH INCLUDES THE LIMITED WARRANTY, EXCLUSIONS FROM WARRANTY COVERAGE, AND THE SERVICE POLICY CONCERNING MY NEW HOME FROM FIRST TEXAS HOMES, AND AGREE TO TAKE THE RESPONSIBILITY OF READING SUCH DOCUMENTS.

Community_____

Lot #_____ Block #_____

Purchaser_____

Purchaser_____

Date_____

First Texas Homes Representative_____

WELCOME TO FIRST TEXAS HOMES

INTRODUCTION

When purchasing a new home at First Texas Homes, we feel that service is so important we want to discuss it with you at the point of sale. As a future First Texas Homeowner, you will want to know more about warranty and maintenance.

Our feeling is that the more you know about your home, the better you will be able to take care of it and that means you'll enjoy it more. Please sign the attached acknowledgement page stating you have received the Homebuyer's Manual and return it to you Sales Manager.

To inform you of what to expect from this point forward, here is a list of events to follow from the point of sale through closing and the service procedures after move-in.

- A. Approved Lender List
- B. Flow Chart of Events to Follow
- C. Important Issues
- D. Limited Warranty
- E. Exclusions from Warranty
- F. Service Policy
- G. Residential Warranty Specimen Booklet

**Please See Your Sales Manager
for Approved Lender List.**

FLOW CHART OF EVENTS TO FOLLOW

A. Final Contract Acceptance

1. Customer signs contract
2. Contract approval

B. Mortgage Approval

1. Customer makes mortgage application within 5 days
2. Customer submits mortgage documents
3. Receive mortgage approval per contract

C. Color Selections

1. Customer makes color selections
2. Plans ordered
3. Engineering ordered
4. Plans submitted for architectural approval

D. Plans Submitted to City

1. Plans submitted to city

E. Pre-Construction Meeting

1. Pre-Construction meeting with Sales & Builder
2. Construction Begins

F. Construction Process

1. Lot graded and form board inspection
2. Rough plumbing/inspection
3. Slab poured/slab set up inspection
4. Framed

G. Mechanical Systems

1. Plumbing lines
2. HVAC ducts
3. Electrical wiring & gas lines
4. Inspection

H. Interior Finish

1. Insulation
2. Sheetrock
3. Installation: interior doors, molding, trim, countertops
4. Interior paint, tile, wallpaper
5. Plumbing, HVAC, electrical finished
6. Flooring

I. Grading & Landscaping

1. Final grading
2. Landscape, sidewalk, drive, patio
3. Fence
4. Final inspection
5. Final appraisal

J. Home Orientation/Settlement

1. Home Orientation Walk
2. Customer transfer utility
3. Final Home Approval Walk
4. Close at Title Company
5. Loan funds & keys released
6. Move in day

K. Limited Warranty

1. 1 year Builder's Warranty
2. Residential Limited 10 Year Structural Warranty

IMPORTANT ISSUES

A. FINAL CONTRACT ACCEPTANCE

The acceptance of your final contract for your new home is a major threshold and starts the many wheels in motion to make your new home become a reality. ***It is imperative you make mortgage application within 5 days.*** While we strive to provide our buyers maximum flexibility, we regret that changes made to your home plans following the completion of final plans are very difficult to accomplish. A new home is a complex product, requiring careful control and coordination of the many skilled subcontractors, suppliers, inspectors etc. involved in the process. We must have a controlled and efficient process to complete the construction of your new home. Therefore, please take the time to consider all the features you want in your home before the final contract acceptance. While it is sometimes possible to make changes following the completion of this planning process, they do impact schedules and expenses. Following the completion of final plans, all materials and work orders are completed and released. Changes made after the release of these orders invariably result in delays and **additional costs**.

B. MORTGAGE APPROVAL

As your mortgage loan application is processed, the mortgage lending company will contact you directly regarding any questions they may have concerning your loan application. It is not unusual for them to request additional information following the initial loan application. Under normal circumstances, you may expect to receive a preliminary approval. This time frame is subject to all bank and employer verifications being received back to the lender in a timely manner.

If loan approval is subject to certain conditions, you will have to provide evidence of satisfying those conditions prior to closing on your new home.

Upon approval, the lender will submit to us a copy of your loan commitment letter so that we can assist you in making sure that all conditions are satisfied and avoid last minute delays. When you receive your written loan approval letter, read it carefully so that you understand any requirements which must be met before closing can take place. If you have any questions, contact your Loan Representative as soon as possible.

Important: Please notify your Loan Representative immediately if, prior to Closing, any changes occur in your employment or financial status. In addition, if you or the seller make any changes to the Agreement of Sale once your loan has been processed or approved, please communicate them to the lender immediately. Some changes may affect your loan approval and could require the lender to re-process your loan or re-qualify you.

C. COLOR SELECTIONS

If you purchased your home as a pre-sale, color selections should be made at the point of sale. If you purchased your home during the construction stage, there are some things you should know regarding interior color selections.

There may be certain materials available for the interior of your home that you will be able to select. These items are made available for a certain length of time only. The reason for this is that unless they have been selected by you prior to the “cutoff date”, we must select them. This cutoff date is the last day the selection can be ordered from the subcontractor and meet production schedules.

PLEASE NOTE: Chosen selections and options which are upgrades (additional money over your contract price) must be added to your purchase contract as an Addendum or Change Order. If you choose to finance options and selections, those upgrades must be selected within seven days of contract or prior to loan application. If this is not possible or practical, you will be required to pay 100% cash for these items.

Your Sales Manager will work with you to finalize the selection of the optional features and the details needed for the development of final plans. This will involve all issues that would affect the structural design, roof plans, foundation plans and the floor plans for your new home. Completion of this portion of the planning process allows us to prepare plans and specifications, as well as place orders for engineered components, such as foundation, beams, floor trusses, etc., which require long lead times.

D. PLANS SUBMITTED TO CITY

Once foundation plans have been received from the Engineer, they will be submitted to the city. This process varies depending on the workload of the city permitting department.

E. PRE-CONSTRUCTION MEETING

Before the construction of your new home begins, you will be invited to a Pre-Construction Meeting (Red Line Meeting). Your Sales Manager can then introduce you to the Construction Superintendent who is responsible for overseeing the complete construction of your new home. At this time we will:

- * Review the placement of the home, easements, and any specific community restrictions that would affect how the home fits on the home site.
- * Review the Contract, change orders and decorator selections to ensure that all parties are in agreement about what the finished product will be.
No additions, decorative improvements, or any alterations are permitted other than those performed by our employees or contractors in accordance with your Sales Agreement, until after Closing.

As all building materials for your home will have been ordered by the time this meeting occurs, additional selection changes are usually no longer possible. Please take advantage of this meeting, as it affords you the opportunity to discuss whatever questions you may have.

Please be aware that your attendance is not mandatory and the building process will continue should you be unable to attend. We regret that construction cannot be interrupted to allow time for scheduling conflicts, thus it is generally not possible to reschedule this meeting.

A Pre-Construction Meeting (Red Line Meeting) may not be possible if the home you have purchased is already under construction.

Please note: At this point, Sales Manager will collect the 2nd earnest money deposit.

F. CONSTRUCTION PROCESS

The construction process is complex and involves a close coordination of the various construction steps. Each step is dependent upon completion of the preceding steps. Weather may cause delays; however, our construction procedures are designed to complete your home in an efficient, controlled manner. Construction will not take place every day, as some flexible time is designed into each construction schedule. Every effort is made to complete homes on schedule.

Normal construction time, again subject to variables such as the size of your home, construction volume, and weather conditions, usually ranges from 100 to 180 working days from when construction begins.

G. MECHANICAL SYSTEMS

We will conduct a thorough framing check of the inside of the house and proceed with the “rough-in” installation of all mechanical systems include plumbing line, heating and air-conditioning ducts, electrical wiring, and gas lines. These components are installed while the interior walls are open and accessible, and may require 5 to 10 days, the time period being subject to normal construction variables.

H. INTERIOR FINISHING

Once the mechanical systems are installed and inspected, the insulation is placed in the exterior walls. Then the walls and ceiling surface of the home are finished by nailing drywall to the studs, joist, and rafters.

The interior finish work continues with the installation of interior doors, moldings, and trim. The interior of the home is painted and any fireplaces are finished with the appropriate facing material. All cabinets and counter top work is then completed. The plumbing, heating, and electrical finish details follow including the installation of hot water heater, furnace, major electrical appliances, and lighting fixtures. The floor and/or wall coverings you may have selected are then installed.

L. GRADING AND LANDSCAPING

Once the interior of your home is completed, it's time to begin final grading, landscaping and the installation of the sidewalk, driveway, and patio if selected.

Your finished home is again inspected by the local Building Inspectors. Your new home is now ready for the Pre-Closing Orientation, Closing, Move-in, and many years of enjoyment.

Please remember the start of construction is dependent upon your removal of all contingencies and completion of the planning and contract acceptance process.

J. HOME ORIENTATION AND CLOSING DAY

Home Orientation Day is the day of orientation and inspection of your new home. Prior to closing and move-in, First Texas Homes will set up an appointment with you, usually 10 to 12 business days prior to your closing appointment. You can expect to spend 2 hours walking the home with a Quality Control Manager, which will familiarize you with the operation of all equipment and review your maintenance responsibilities. Please set aside enough time so you can be relaxed and if possible, leave children with a babysitter. Any discrepancies will be noted on a "Check List". Only upon successful completion of the Home Orientation "Check List" will we be in a position to close on your new home.

The speed with which we can attend to items during the Home Orientation depends on the number of move-ins that occurs during the same time period. Nevertheless, we will attempt to correct all listed items within five to ten working days after your Home Orientation appointment.

You should give special attention during your Home Orientation to the following items:

****Wood Panels, Kitchen Cabinets, Counter Tops and Door Surfaces-*** visible defects not noticed during Home Orientation will not be covered by our Limited Warranty.

****Light Fixtures-*** We will repair or replace lighting fixtures only if these have been noted on the Home Orientation Check List.

****Plumbing Fixtures-*** Responsibility for any fixtures damaged or chipped after your Home Orientation will be assumed by you. We will repair or replace a damaged fixture only if it has been noted on the Home Orientation Check List.

****Windows and Screens-*** Torn, damaged or broken items pertaining to the windows and screens will be replaced only if noted on the Home Orientation Check List.

****Flooring-*** Responsibility passes to you for damaged hardwood, stained carpet, chipped tile or marble surfaces once the Home Orientation has occurred.

On Closing Day, you'll meet with a representative from the Title Company to execute the documents and present your certified or cashier's check for all monies due from you, as described in your Agreement of Sale, and as specifically identified by your lender. It is the job of this representative to disburse all monies to the appropriate parties, and to record the necessary documents to protect the interest of you and your lender. When closing is completed, the ownership of the home is transferred to you. Please be aware that occupancy will not occur until all funds have been disbursed. Due to insurance regulations, we are unable to permit storage of personal property in your new home prior to closing and funding.

CAPITAL TITLE OF TEXAS
1400 Preston Road
Suite 200
Plano, Texas 75093
Phone – (972) 596-2379
Fax – (972) 596-6108
 Marylyn Aston

SENDERA TITLE
7161 McKinney Ave
4th Floor
Dallas, Texas 75204
Phone – (214) 891-1957
Fax – (214) 891-1958
 Blanca Kelly

CAPITAL TITLE OF TEXAS
7301 North State Hwy 161
Suite 120
Irving, Texas 75039
Phone – (972) 556-1600
Fax – (972) 556-1235
 Gayle Smith

SENDERA TITLE
5320 Camp Bowie Blvd
Suite A
Fort Worth, Texas 76107
Phone – (817) 263-4445
Fax – (817) 263-6279
 Blanca Kelly

SENDERA TITLE
12400 Preston Road
Suite 120
Frisco, Texas 77027
Phone – (972) 232-7200
Fax – (972) 232-7201
 Claudia Short

SENDERA TITLE
505 S. Henderson Street
Fort Worth, Texas 76104
Phone – (817) 263-4445
Fax – (817) 263-6279
 Blanca Kelly

Once your loan funds, the keys will be given to you by your Sales Manager. Now the most exciting step of all – moving into and enjoying your new home!

You are responsible for activating telephone connections and transferring electric, gas, and water services into your name. Deposits will often be required from you by the utility companies. To assure uninterrupted services, contact the utility companies ahead of time so that transfer begins immediately on the day of closing. This is an important item since utility services in your builder's name will be disconnected within three days after closing.

As a continuing effort to improve our services as a homebuilder, we will be requesting your input on several occasions about your home buying experience with our company.

K. FIRST TEXAS HOMES LIMITED WARRANTY & 10 YEAR LIMITED WARRANTY

First Texas Homes warrants to the original buyer that the original construction of the home will be free from defects in material and workmanship for a period of one (1) year after closing date.

First Texas Homes also offers a 10 year limited structural warranty that covers the structural integrity of your home. This warranty is transferable. (See attached Residential Warranty Specimen).

First Texas Homes warrants that the original installation of the plumbing, electrical, heating and air conditioning systems will be free from workmanship defects which appear at any time within the first year.

First Texas Homes warrants that the original construction of the roof, foundation, floor and walls of the home will be free from structural defects which significantly affect the load bearing functions any time within one (1) year after the closing date.

Appliances, fixtures, equipment and other components included in your First Texas Home will be covered by separate written warranties of the manufacturers or suppliers of those items (manufacturer's warranties). First Texas Homes hereby assigns all of those manufacturers or suppliers of those components. Examples include (but not limited to): range, dishwasher, water heater, heat pump, air conditioner, furnace, smoke detector, garage door opener. You may contact the supplier directly for warranty services on any of these items.

Swimming pools, retainer walls and fences will be covered by the installer of these add-ons. After closing dates, defects in these structures will not be covered by First Texas Homes.

EXCLUSIONS FROM FIRST TEXAS HOMES WARRANTY COVERAGE

We feel these exclusions are common and known by all. However, we want to clearly state the exclusions for our customers in order to avoid guess work and assumptions derived from the lack of information. Assumptions usually create frustration in the future.

1. All items that are not an integral part of the structure of the home specifically referred to in the Homeowner's Manual are considered exclusions. Also, the warranty does not cover conditions or damage caused by an act of God or Mother Nature.

- a. Deficiencies or defects resulting from: riot, civil commotion, or act of God including but not limited to rot, insect damage, fire, explosion, smoke, water escape, windstorm, mudslide, hail, lighting, falling trees, aircraft, vehicles, flood, earthquake, volcanic eruption, hurricane, tornado, sink hole or change in the level of underground water table.
- b. All landscaping including but not limited to sodding, seeding, shrubs, trees and planting.
- c. Deficiencies or defects caused by soil movement.
- d. Any contamination caused or created by material or manmade chemicals, compounds, or substances

2. The warranty does not cover conditions or damage caused by lack of maintenance or additions, changes or alterations after the warranty enrollment date.

- a. Any loss or damage which arises while the home is not being used for residential purposes.
- b. Changes, alterations or additions made to the home by anyone other than First Texas Homes.
- c. Changes of grading of the site by anyone other than First Texas Homes.
- d. The warranty does not cover deficiencies or defects caused by neglect.
- e. Deficiencies or defects caused or made worse by the owner, occupants or guest.
- f. Normal wear and tear.
- g. Any improvements installed after the warranty date and any part of the property not included in the purchase price.

3. First Texas Homes warranty does not cover manufacturers and other implied warranties after the 1st year. These manufacturers and suppliers may have written warranties of their own.

- a. Swimming pools, recreational facilities, fences, boundary walls, and retaining walls.
- b. Appliances, fixtures and equipment including but not limited to refrigerator, range, dishwasher, garbage disposal, water heater, heat pump, air conditioner, furnace, smoke detector, garage door opener.

4. First Texas Homes warranty does not cover claims which were caused by the homeowner.

- a. Dampness, mildew or condensation due to the failure of the homeowner to maintain adequate ventilation.
- b. Negligence in proper maintenance.
- c. Any abuse of the house.
- d. Any failure of the purchaser to give notice to First Texas Homes of the deficiencies or defects within a reasonable time.
- e. Any of the above conditions resulting from the home being unoccupied for any length of time.
- f. Any conditions resulting from the home being rented or leased to another party.

ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTY OF MERCHANTABILITY (HABITABILITY) AND SUITABILITY FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED.

FIRST TEXAS HOMES SERVICE POLICY

First Texas Homes' service policy is driven by our total corporate commitment to deliver outstanding customer service and to satisfy your home buying expectations.

Your Warranty Coordinator and Warranty Manager will be your primary contact for service 30 days after you have closed on your home. Most questions and routine maintenance items may be answered by reading your First Texas Homeowners' manual. The Homeowner manual will be given to you and reviewed with you during the time of your Home Orientation.

To Request Additional Services

Should you require additional services after closing you will be asked to fill out a "Service Request Form", and then send it to the Warranty office. First Texas Homes will acknowledge your request and schedule an appointment time for the repair.

In some instances you will need to contact First Texas Homes subcontractors directly. Also many appliances and other products are protected by manufacturer' warranties, and can be contacted using their toll-free 800 hotline numbers. You will receive a sticky card that will be placed inside one of your kitchen cabinets at the time of the Home Orientation with the subcontractor's name and telephone number.

Should a problem occur that you are not sure how to handle, call First Texas Homes Warranty Department office during regular business hours, Monday through Friday, 8:00 a.m. to 5:00 p.m. Your Warranty Coordinator will be able to assist you in resolving any concern.

Service Access to Your Home

When warranty service or routine repairs are necessary, First Texas Homes personnel and our Contractors will need access to your home during normal working hours. If you or your spouse cannot be available, we ask that you authorize, in writing, a neighbor or friend to provide the necessary access.

Remember, Your Sales Manager Is Your "Home Team" Representative- All communication (including construction requests) must be initiated through your Sales Manager. He/She can assist you as questions arise during the construction of your home.

Please Don't "Drop In" On your Superintendent- Your Superintendent's demanding schedule requires that he plan his day in advance. Unexpected visitors asking for "just a few minutes of your time" result in construction schedules not being met and progress being slowed down. When this happens with enough of his customers, your Superintendent does not progress with the construction of your home or your future neighbors' homes. If you must meet with your

Superintendent at times other than the pre-arranged times, please contact your Sales Manager. A meeting can be arranged through your Sales Manager with your Superintendent between 10:30 a.m. and noon, Monday through Friday. However, we ask your cooperation in minimizing these requests.

Thank you for purchasing a First Texas Home. We look forward to working with you for the next few months while your new home is under construction as well as for the first year limited warranty.

We hope when the whole process is completed First Texas Homes has met or exceeded your expectations.



StrucSure

HOME WARRANTY

TEXAS 1-2-10 EXPRESS LIMITED WARRANTY



One-Year Workmanship/Materials



Two-Year Delivery Portion of Systems



10-Year Major Structural Defects

- RESIDENTIAL -



Administered by:

StrucSure Home Warranty, LLC

6825 East Tennessee Avenue, Suite #410

Denver, CO 80224 (Corporate Office)

1.877.806.8777 | info@strucsure.com

www.strucsure.com

Table of Contents

WHAT DOES MY WARRANTY COVER?	i
SECTION 1: OVERVIEW OF THE STRUCSURE HOME WARRANTY EXPRESS LIMITED WARRANTY	1
SECTION 2: DEFINITIONS	2
SECTION 3: LIMIT OF LIABILITY	4
SECTION 4: MULTI-DWELLING BUILDING AND UNIT COVERAGE	5
SECTION 5: HOMEOWNER DUTIES & RESPONSIBILITIES	6
SECTION 6: EMERGENCY PROCEDURES	7
SECTION 7: EXCLUSIONS	7
SECTION 8: WORKMANSHIP/MATERIALS & DELIVERY PORTION OF SYSTEMS COVERAGE	10
SECTION 9: HOW TO REQUEST WARRANTY PERFORMANCE FOR A WORKMANSHIP/ MATERIALS AND/OR DELIVERY PORTION OF SYSTEMS DEFECT OR DEFICIENCY	11
SECTION 10: MAJOR STRUCTURAL DEFECT COVERAGE	13
SECTION 11: HOW TO REPORT A MAJOR STRUCTURAL DEFECT CLAIM	14
SECTION 12: CONDITIONS OF WARRANTY PERFORMANCE	16
SECTION 13: DISPUTES MUST BE SUBMITTED TO ARBITRATION	17
PERFORMANCE STANDARDS FOR HOME COMPONENTS UNDER THE ONE-YEAR WORKMANSHIP/MATERIALS WARRANTY	18
PERFORMANCE STANDARDS FOR ELECTRICAL, PLUMBING, AND MECHANICAL DISTRIBUTION SYSTEMS UNDER THE TWO-YEAR DELIVERY PORTION OF SYSTEMS WARRANTY	36
PERFORMANCE STANDARDS FOR MAJOR STRUCTURAL COMPONENTS UNDER THE 10-YEAR STRUCTURAL DEFECT WARRANTY	40
WORKMANSHIP, MATERIALS OR SYSTEMS SERVICE REQUEST AND CLAIM FORM	43
MAJOR STRUCTURAL DEFECT WARRANTY CLAIM FORM	44
HOMEOWNER INFORMATION RESOURCES	BACK COVER

What Does My Warranty Cover?

i




WORKMANSHIP & MATERIALS

Includes one-year coverage on items related to workmanship and/or materials under our 1-2-10 warranty.



WIRING, PIPING & DUCTWORK

Includes two-year coverage on items related to the electrical, plumbing, heating, cooling, ventilation, and mechanical systems under our 1-2-10 warranty.



STRUCTURAL COMPONENTS

Includes 10 years of coverage on major structural defects that affect the load-bearing components of a home under our 1-2-10-year warranty.

1- & 2-YEAR WARRANTY



COMPONENTS COVERED UNDER THE ONE-YEAR WORKMANSHIP & MATERIALS WARRANTY*

1. Site work
2. Concrete
3. Masonry
4. Carpentry
5. Doors & windows
6. Siding & roofing
7. Finishes
8. Specialties (e.g., fireplaces)
9. Equipment (e.g., cabinets)
10. Mechanical systems (e.g., plumbing)
11. Heating, air conditioning, and ductwork
12. Electrical systems

COMPONENTS COVERED UNDER THE TWO-YEAR WIRING, PIPING, AND DUCTWORK WARRANTY*

1. Water supply system
2. Septic tank system
3. Plumbing
4. Electrical
5. Heating
6. Air conditioning

*Please reference your Warranty Coverage Booklet for specific terms, conditions, and exclusions.

10-YEAR WARRANTY



COMPONENTS COVERED UNDER THE TEN-YEAR STRUCTURAL WARRANTY*

1. Foundation systems, footings, and piers
2. Floor framing systems
3. Walls and partitions
4. Roof framing systems
5. Beams
6. Headers
7. Girders
8. Lintels
9. Columns (other than those designed to be cosmetic)
10. Masonry arches (other than those designed to be cosmetic)

SECTION 1: OVERVIEW OF THE STRUCSURE HOME WARRANTY EXPRESS LIMITED WARRANTY

Congratulations, Homebuyer! Your Builder is a member of the StrucSure Home Warranty program and sold You a Home that includes Express Limited Warranty protection. This Warranty booklet defines standards for the various components of a Home, the time periods, the scope of coverages, exclusions, homeowner responsibilities, and how to request warranty service and file a claim.

You may have been provided sample warranty booklets during the process of purchasing Your Home; however, Your actual Warranty booklet is assigned at closing. After Your Warranty goes into effect, You can access and download Your Warranty booklet and Certificate of Warranty Coverage via the Warranty Portal at <https://warranty.strucsure.com>. If You do not have Internet access, You can request Your warranty documents by mail.

Your Warranty will not go into effect until the signed Home Enrollment Application (HEA) and warranty payment have been received, processed, and approved by StrucSure Home Warranty, LLC.

Read this Warranty booklet in its entirety so that You may fully understand the terms and conditions. Please contact our customer service department at [1.877.806.8777](tel:18778068777) with questions or for more information.

This Warranty embodies the entire extent of the Express Limited Warranty provided to You by Your Builder, which is insurance backed. Under this Warranty, the coverage periods for the Home are as follows:

One (1) year for Workmanship/Materials,

Two (2) years for Delivery Portion of Systems (plumbing, electrical, heating, and air-conditioning delivery systems),

and

Ten (10) years for Major Structural Components of the Home.

**Please reference the schematics on page i to understand each of these different Home components.*

If it is determined by the Administrator that the Builder is unable to perform or is in default of the one (1) year Workmanship/Materials and two (2) years Delivery Portion of Systems warranty obligations, GIC shall perform, through the use of its Administrator, the Builder's warranty obligations. For Major Structural Defects, GIC, has agreed to perform, through the Administrator, the Builder's obligation for the complete 10-year warranty period. As a precondition to coverage, defects and/or deficiencies must occur and be reported within the Warranty Term. StrucSure Home Warranty, LLC is the warranty Administrator and not a warrantor.



SECTION 2: DEFINITIONS

Unless defined or described in this Warranty, all terms and words shall have their plain, ordinary meaning commonly used in the residential construction or home warranty industries. Whenever the first letter of a word or the first letter of all substantive words in a phrase is capitalized, that word or phrase shall have the same meaning as defined in Section 2 of this Warranty.

Administrator: StrucSure Home Warranty, LLC is the Administrator of the StrucSure Home Warranty Program and not a warrantor.

ASCE Guidelines: "Guidelines for the Evaluation and Repair of Residential Foundations, Version 3," published by the Texas Section of the American Society of Civil Engineers (2022).

Builder: The person, corporation, partnership, or other entity that is a member of the StrucSure Home Warranty Program and is listed on the StrucSure Home Warranty HEA. The Builder is the Warrantor of this Warranty provided for the Home.

Certificate of Warranty: This is a certificate issued by the Administrator confirming that Your Builder completed the required enrollment of Your Home in the Structural Home Warranty Program and confirms the issuance of this Warranty.

Code: The International Residential Code or if the context requires, the National Electrical Code.

Common Elements: Any portion of a multi-family building that is defined as a Common Element in either common interest or ownership laws or in the declaration establishing such community that is shared between units. Common Elements may include, without limitation, hallways, roofs, exterior finishes, and electrical, plumbing, and mechanical distribution systems.

Delivery Portion of Systems: The electrical, plumbing, and mechanical distribution systems in Your Home.

Effective Date of Warranty: For the Home, the Effective Date of Warranty is the date listed on the Certificate of Warranty. For multi-dwelling units such as condominiums, townhouses, and duplexes, the Effective Date of Warranty for Common Elements coverage is the date the first Certificate of Occupancy was issued for the building.

Express Limited Warranty: The terms and provisions contained within this Warranty booklet.

Extreme Weather Condition(s): Severe or unseasonal weather or weather phenomena that are at the extremes of the historical distribution. Weather conditions in excess of or outside of the scope of the design criteria stated or assumed for the circumstance or locale in the Code.

Golden Insurance Company, a Risk Retention Group (GIC): The Warranty Insurer who underwrites the StrucSure Home Warranty Program. If, in the discretion of the Administrator, it is determined that the Builder is unable to perform or in default of the one (1) and two (2) years warranty obligations, GIC shall perform, through the use of its Administrator, the Builder's warranty obligations. For Major Structural Defects, GIC has agreed to perform, through the Administrator, the Builder's obligation for the complete 10-year Warranty Term.

HEA: Home Enrollment Application.

Home: The dwelling or property as identified by the address on the HEA.

Homeowner: The person(s) listed as the Homeowner(s) on the original HEA, and who holds the legal title to the Home. Included in the definition are any subsequent purchasers who hold the legal title to the Home.

Major Structural Defect (MSD): A condition of a Structural Component listed in Section 10 and that fails to meet the Performance Standards for Major Structural Components Under the 10-Year Structural Defect Warranty.

Original Construction Elevations: Actual elevations of the foundation taken before, on, or about the Effective Date of Warranty of the residential construction project. Such actual elevations shall include elevations of porches and garages if those structures are part of a monolithic foundation. To establish original construction elevations, elevations shall be taken at a rate of at least one elevation per 100 square feet showing a reference point and shall be taken at a rate of at least one elevation per 10 linear feet along the perimeter of the foundation, subject to obstructions. Each elevation shall be taken on the surface of the foundation or on the surface of the floor covering on the foundation, if any. For elevations taken on floor coverings, the type of floor covering shall be recorded at each elevation location. If no such actual elevations are taken, then the foundation for the habitable areas of the home are presumed to be level +/- 0.75 inch (three-quarters of an inch) over the entire area of the foundation.

Performance Standard: The standard(s) to which a Home or an element or component of a Home constructed as a part of new Home construction, a material improvement, or interior renovation must perform. Performance Standards are set forth in this Warranty.

Residential Code: The requirements specified in the text of the Residential Code officially adopted by the state, city, county (or parish) in which Your Home is located.

Span (L): Except for slab foundations, L shall be calculated as the distance between two supports for structural elements supported at both ends. For cantilever elements, L shall be determined as twice the distance from the last support to the unsupported end of the element. For slab foundations, L shall be defined as the edge to edge distance across any slab cross-section for which deflection or tilt is to be calculated but the minimum L shall be not less than 25 feet, and shall not include a detached or non-monolithic garage slab. If a monolithic garage slab is included and that slab was built with a slope in the garage floor, measurements shall be taken off the ceiling at locations immediately adjacent to the garage walls. For slab foundations, L shall be calculated to determine overall deflection, not localized deflection or tilt of slab foundations.

Warranty: The Express Limited Warranty for Workmanship/Material, Delivery Portion of Systems and Major Structural Defect set forth in this StrucSure Home Warranty booklet as provided by the Builder.

Warranty Term: The period during which the one (1) year Workmanship/Material, two (2) years Delivery Portion of Systems, and ten (10) years Major Structural Defect are effective. The warranty term starts on the Effective Date of Warranty or the Effective Date of Warranty for Common Elements.

You/Your: The Homeowner(s) or Homeowner's Association if the claim involves Common Elements in a Multi-Dwelling Building.

SECTION 3: LIMIT OF LIABILITY

You have accepted the terms provided in this Warranty, and all other express or implied warranties, including any oral or written statements or representations made by Your Builder or any implied warranty of habitability, merchantability or fitness, good and workmanship, and repair are hereby disclaimed by Your Builder and hereby waived by You to the extent possible under the laws of Your state.

Any action or claim, regardless of form, that arises from or relates to this Warranty, the construction and/or the improvements to the Home is barred unless it is brought no later than two (2) years and one (1) day from the date the cause of action accrues.

The Homeowner(s) agree that with respect to any loss or damage that may occur to the Home that could be or is insured against under the terms of standard fire and extended coverage insurance policies, or any other insurance, regardless of the cause or origin, such insurance and suffering said loss, hereby release the Builder, GIC, or Administrator from any and all claims with respect to such loss. The Homeowner(s) agree that the respective insurance company shall have no right of subrogation against the Builder, GIC or Administrator on account of any such loss as all rights of subrogation are hereby waived and disclaimed.

Subject to the provisions of this Warranty, the Builder's and GIC's total aggregate limit of financial liability under this Warranty shall not exceed the original sales price of the Home (as shown on the HEA) or \$3 million, **whichever is lower**. This means that every time Your Builder or GIC pays for costs of determining the existence and/or extent of a covered defect and/or deficiency, pays for a repair, or pays a claim, those payments are deducted from the sales price of the Home listed on the HEA (the Warranty Limits). Once that total aggregate equals the sales price of the Home on the HEA or \$3 million (**whichever is lower**), Your Warranty Limits are exhausted and there is no further warranty coverage.

The Builder's and GIC's total aggregate limit of financial liability for a multi-dwelling building shall not exceed the aggregate original sales price of each unit (as shown on the HEA) located within a single multi-dwelling building or \$3 million, whichever is lower. If the payment is for Common Elements of a multi-dwelling building, payment shall be deducted pro rata from the sales price listed on the HEA for each unit. There is no warranty coverage for any defect, loss or claim if there is any other valid and collectible insurance. The Warranty is neither primary nor contributory to any other available insurance, whether primary, excess, contingent or any other basis. This Warranty is not Your Builder's general liability insurance. This Warranty is not a maintenance agreement, service contract, an insurance policy or homeowner's insurance.

This Warranty is separate and apart from any other contracts between You and Your Builder, including any sales agreements. It cannot be altered, affected, or amended in any manner by any other agreement except only through a formal written agreement signed by the Builder, GIC, the Administrator, and You.

This Warranty does not cover special, incidental, indirect, or consequential damages and does not reimburse parties for their attorney's fees or costs.

This Warranty does not cover latent defects that do not result in actual physical damage. This Warranty is binding on the Builder and You and Your heirs, executors, Administrators, successors, and assigns. An assignment or transfer of benefits, rights or sums payable under this Warranty is prohibited except as expressly allowed in this Warranty.

This Warranty automatically transfers to subsequent owners during the Warranty Term upon the transfer of title to the Home. There is no limit to the number of transfers during the Warranty Term or any cost as a result of such

transfer(s). Each subsequent owner will be bound by (1) *all* terms of this Warranty, including, but not limited to, those regarding arbitration and (2) every act or failure to act by any past owner to the extent that the act or failure to act affects this Warranty or the rights and obligations of either party. Any release executed by You shall bind a mortgagee and any subsequent owner.

If any term, condition, or provision of this Warranty is found to be void or a violation of law or public policy by an arbitrator or court, it shall be deemed modified to the extent necessary so that it is no longer void or in violation of law or public policy. Any binding decisions that determine a part of the Warranty is void, or in violation of law or public policy, will not serve to invalidate the enforceability of any other term, condition, or provision of this Warranty.

SECTION 4: MULTI-DWELLING BUILDING AND UNIT COVERAGE

If the Home is located within a multi-dwelling building, then the additional provisions below apply.

Clubhouses, recreational facilities, exterior structures, exterior walkways, decks, balconies, arches, or any non-residential structure(s) that are a part of the multi-dwelling unit (whether attached or not) are not covered by this Warranty. Equipment or systems that are owned by the condominium association or designated as a condominium common area are not covered. Coverage will not be provided for Common Element exterior stairways and landings, unless they are constructed entirely of metal or concrete (or in any combination of these two materials).

The Common Elements of the multi-dwelling building will be free from Workmanship/Materials, Delivery Portion of Systems, and Major Structural Defects during the Common Element Warranty Term. Common Element defects/deficiencies must be reported within the applicable Warranty Term. The association governing the multi-dwelling building must file the claim for defects/deficiencies concerning Common Elements. An investigation fee of \$300 is owed for each unit located within a building, in which a claim is being submitted for Common Elements.

Upon notice by the Builder, GIC, or the Administrator, You agree to allow access to Your Home during normal business hours for all inspections and/or repairs to Your unit, any adjacent unit or the Common Elements.

The aggregate warranty limit for a multi-dwelling building for Common Elements is the total of the remaining Warranty Limits of those dwellings within the multi-dwelling building that have a valid and unexpired Warranty. If there are one or more dwellings in the multi-dwelling building that have no valid or has an expired Warranty, then the aggregate warranty limits for Common Elements is calculated on a pro-rata basis: The aggregate of the original sale price for all dwellings within the multi-dwelling building that have a valid and unexpired Warranty divided by the aggregate original sale price for all dwellings within the multi-dwelling building.

All costs to investigate defects/deficiencies, repairs or pay a claim incurred by the Builder or GIC for a Common Element is deducted from remaining Warranty Limits of each dwelling in the multi-dwelling building with a valid and unexpired Warranty on a pro-rata basis: The original sales price of each dwelling in the multi-dwelling building divided by the aggregate of the original sales price of all dwellings in the multi-dwelling building.

All provisions of this Warranty apply to this Section 4. To the extent that any provisions contained outside Section 4 of this Warranty directly conflict or cannot be reconciled with the provisions contained within this Section 4, the provisions contained within this Section control.

SECTION 5: HOMEOWNER DUTIES & RESPONSIBILITIES

You have duties and responsibilities under the law and under this Warranty. This Warranty is expressly conditioned on Your full performance of duties (express or implied) relating to residential construction and the Warranty. These duties include, but are not limited to:

- (1) You are responsible for the proper maintenance of Your Home. Regular preventative maintenance is necessary to prolong the life of the Home. Your obligation is to care for Your Home in such a way as to prevent or minimize damage to it. You should be aware that all new homes go through a period of settlement and movement. During this period, Your Home may experience some minor material shrinkage, cracking, and other events that are normal and customary.
- (2) Maintenance of the Home and the lot on which the Home is located is essential to the proper functioning of the Home, and You are responsible for that maintenance. You are responsible for maintenance items described in this Section and those maintenance items identified separately in this warranty booklet. Additionally, You are responsible for ongoing maintenance responsibilities that affect the performance of the Home but that may not be expressly stated in this booklet. Such ongoing maintenance responsibilities include, but are not limited to:
 - (a) Periodic repainting and resealing of finished surfaces as necessary,
 - (b) Caulking for the life of the Home,
 - (c) Regular maintenance of mechanical systems,
 - (d) Regular replacement of HVAC filters,
 - (e) Cleaning and proper preservation of grading around the Home and drainage systems to allow for the proper drainage of water away from the Home, and
 - (f) Other standard and customary maintenance repairs.
- (3) In connection with the investigation and determination of Your claim, You may be sent a series of recommendations to be implemented. If You fail to implement the recommendations or substantiate that the recommendations were implemented, the Administrator may deny a future claim for benefits if the failure to implement the recommendations that caused or contributed to a defect/deficiency in the Home.
- (4) You shall take measures to reduce/prevent swelling or shrinking soil as it can cause damage by either expanding when moisture is added or shrinking when it dries out (which can cause uplift to concrete slabs and other property damage). Best practices include, but are not limited to: maintaining adequate runoff drainage slopes; cleaning gutters and downspouts; ensuring that lawns and gardens are not over watered; properly maintaining sprinkler systems; preventing landscaping materials or plants, trees, and/or shrubs from contacting the exterior surface of the Home and from interfering with the proper drainage of water away from the foundation; positive slopes in your yard; sealing old construction joints and cracks that develop over time; inspecting concrete and walls; and repairing cracks that are found as soon as possible.


You should not alter the proper drainage pattern or grade of the soil within ten (10) feet of the foundation so that it negatively impacts the Home's performance or fails to comply with the Residential Code.

- (5) When a request for warranty performance is filed and the defect/deficiency cannot be observed under normal conditions, it is Your obligation to substantiate that the Performance Standards are violated and any costs involved.
- (6) You have an obligation to cooperate with the mediation, inspection, and investigation of any warranty request. Your claim will be closed and the applicable Warranty Term will not be extended should You fail to cooperate or respond to requests within thirty (30) days. You agree to provide this Warranty to any subsequent purchaser of Your Home.

SECTION 6: EMERGENCY PROCEDURES

An emergency is a condition that if not immediately repaired will cause damage to the Home or a Home component, will cause danger to the Home's occupants, and/or will make the house uninhabitable.

If You have a One-Year Workmanship/Materials and/or Two-Year Delivery Portion of Systems coverage, You must contact Your Builder and the Administrator (StrucSure Home Warranty) at 1.877.806.8777 in order to receive authorization for any emergency repairs. If You are unable to contact Your Builder and the Administrator for emergency authorization, You must make minimal and temporary repairs that mitigate further damage until authorization for more extensive repairs has been approved by Your Builder and the Administrator.

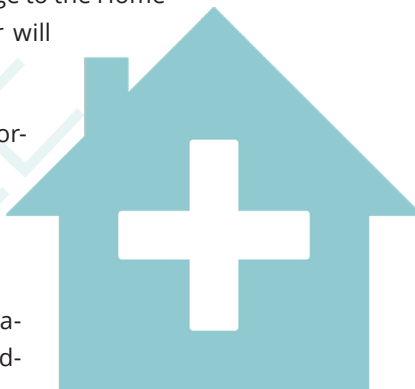

If You have a Ten-Year Major Structural Defect coverage, You must contact the Administrator at 1.877.806.8777 in order to receive authorization for any emergency repairs. If You are unable to contact the Administrator for emergency authorization, You must make minimal repairs that mitigate further damage until authorization for more extensive repairs has been approved by the Administrator.

SECTION 7: EXCLUSIONS

This Warranty does NOT provide coverage for the following items listed in this Section:

- (1) *Any damage, loss or costs incurred by You in connection with any of the following:*
 - (a) The Builder's failure to complete any or all construction of the Home including, but not limited to, compliance with the original plans and specifications, or washing or cleaning of any kind. An incomplete item is not considered a defect/deficiency under the Warranty; however, the Builder may be obligated to complete such items under separate agreements.
 - (b) Any condition, defect/deficiency You were aware of prior to the Effective Date of Warranty, whether appearing on a "walk through" or "punch" list or not.
 - (c) Any changes, modifications, additions, or improvements made to the Home after the Effective Date of Warranty.

- (d) Driveways, detached garages, carports, outbuildings, swimming pools, tennis courts, basketball courts, recreational facilities, boundary and/or retaining walls, bulkheads (except where boundary walls, retaining walls and bulkheads are necessary for the structural stability of the Home), landscaping, sod, seeding, shrubs, trees, plantings, fences, lawn sprinkler systems, subsurface draining systems (other than footer drains), streets, sidewalks, any other appurtenant structure or attachment to the dwelling, and adjacent properties.
- (e) Elements of the Home constructed separately from foundation of the Home including but not limited to decks, balconies, patios, porches, porch roofs, porticos, porte-cocheres, concrete floors of basements, "floating" floor slabs, except as set forth in the Performance Standards for Foundations and Slabs.
- (f) Green Building Compliance: Any and all green building requirements, standards, certifications or otherwise are controlled by those written standards applicable to and agreed upon between the Builder and the initial owner(s), if any, after which there is no warranty or guarantee related to or concerning any such green building requirements, standards, certifications or otherwise to any subsequent owner of the property and/or improvements.
- (g) Any loss, damage, cost, or expense that is caused, in whole or in part, by any peril or occurrence that is covered by Homeowner's insurance, from another warranty or insurance policy, or for which compensation is provided by state legislation and/or public funds.
- (h) Sound transmission and sound proofing.
- (i) The quality and potability of water.
- (j) Violations of local or national residential building codes, standards, or ordinances.
- (k) Diminution in the value of the Home, including but not limited to that amount that is equal to the fair market value of the Home with a defect compared to the Home market value without a defect or the fair market value of the Home with defect that has been repaired versus the Home without a defect ever occurring.
- (l) A Home used for nonresidential purposes.
- (m) A Home that was subject to Foreclosure.
- (n) Any condition that does not result in actual physical damage to the Home.
- (o) Normal wear and tear or deterioration to any component of the Home. This includes, but is not limited to, the deterioration of concrete surfaces caused by salt, chemicals, implements, or any other any factors.
- (p) Bodily injury or personal injury of any kind, including but not limited to physical or mental pain and suffering and emotional distress and any medical or hospital expenses.
- (q) Costs of shelter, transportation, food, moving, storage, kenneling of animals, veterinary expenses, pet daycare, loss of use, loss of wages or profits, inconvenience, annoyance or other incidental expenses including those related to relocation during any work performed under this Warranty.
- (r) Personal property and property that You do not own.
- (s) Any and all exclusions set forth in the Performance Standards.

- (2) Any damage, loss or costs that is caused or made worse by any of the following causes, whether acting alone or in sequence or concurrence with any other causes or causes whatsoever:
- (a) Use of the Home that exceeds the normal design loads prescribed by local or national building Codes, Residential Codes, standards, or ordinances or the engineer of record.
 - (b) The negligence, improper maintenance, misuse, abuse, failure to follow manufacturer's recommendations, failure to take reasonable action to mitigate damage by anyone other than the Builder, or failure to take reasonable action to maintain Your Home.
 - (c) Work performed or material supplied incident to construction, modification, or repair to the Home performed by anyone other than Your Builder or persons providing work or materials at the direction of the Builder. Changes to the grading or drainage surrounding the Home made by anyone other than Your Builder or persons providing work at the direction of the Builder. This includes, but is not limited to, soil erosion or runoff caused by Your failure to maintain the Builder-established grades, changes in the grading caused by erosion, or changes in the level of the underground water table, drainage structures, devices or swales, stabilized soil, sodded, seeded or landscaped areas.
 - (d) War, nuclear hazards, contamination accidents, explosion, riot, civil commotion, terrorism, communicable disease, vandalism, malicious mischief, theft, burglary, blasting, steam or water escape, condensation, mud or mud slides, sinkholes, fire, smoke, Extreme Weather Conditions, drought, windstorm, hail, lightning, ice, snow, blizzard, hurricane, tornado, tsunami, flood, earthquake, land shock waves or tremors occurring before, during, or after volcanic eruption or by any other external cause (whether sudden or gradual), mine subsidence, faults, fissures, crevices, falling trees or other objects, or accidents involving aircraft, vehicles, or boats.
 - (e) Damage resulting directly or indirectly from water intrusion or moisture of any kind, excessive or inadequate water pressure, plumbing failure, flood, surface water, waves, tidal water, overflow of a body of water (whether wind driven or not), wetlands, springs, or aquifers. Water that backs up from sewers or drains, water below the surface of the ground (including water which exerts pressure on, seeps, or leaks under or through a Home, building, sidewalk, driveway, foundation, swimming pool, or other structure). Change in the underground water table that exerts pressure on, seeps, or leaks under the Home, sidewalk, driveway, foundation, or other structure or causes subsidence or sinkholes.
 - (f) Defects, deficiencies, or damage caused by micro-organisms, plants, fungus, decay, wet rot, dry rot, soft rot, or any other kind of rotting, mold, mildew, termites, insects, vermin, rodents, birds, wild or domestic animals, corrosion, rust, radon, radiation, formaldehyde, asbestos, any solid, liquid, or gaseous pollutant, contaminant, toxin, irritant, or carcinogenic substance, whether organic or inorganic, or an electromagnetic field or emission. This Exclusion includes any claim of health risks or inhabitability as a result of Volatile Organic Compounds (VOCs) or any of the foregoing items.
 - (g) Any request for warranty performance submitted after unreasonable delay or after the expiration of the Warranty Term or failure by You to minimize or prevent loss or damage in a timely manner.

SECTION 8: WORKMANSHIP/MATERIALS & DELIVERY PORTION OF SYSTEMS COVERAGE

For one (1) year from the Effective Date of Warranty, Your Builder warrants that Your Home will be free from deficiencies in Workmanship and Materials as defined in the Performance Standards of this Warranty. For two (2) years from the Effective Date of Warranty, Your Builder warrants that Your Home will be free from deficiencies in the Delivery Portion of Systems (electrical, plumbing, and mechanical distribution systems) to the extent stated in the Performance Standards of this Warranty. Notwithstanding a Performance Standard stated in this Warranty, a specialty feature, which is work performed or material supplied incident to certain design elements shown on the construction plans and specifications and agreed to in writing by the Builder and the homeowner, shall be deemed to be compliant with the Performance Standards stated herein so long as all items are compliant with the Code.

If an element or component of a Home is not described particularly in this Warranty, the element or component shall be constructed in accordance with the applicable written agreement. If there is no agreement, the element or component shall be constructed in accordance with the usual and customary residential construction practices, or practices for similar Improvements in the geographic region shall govern and the element or component shall perform for the purpose for which it is intended.

All manufactured products shall be installed by the Builder in accordance with the manufacturer's instructions and specifications. The Builder shall use only new manufactured products and parts unless otherwise agreed in writing by the parties. If the Builder does not install a manufactured product in accordance with the manufacturer's specifications or use newly manufactured parts as required, the Builder shall take such action as is necessary to bring the variance within the standard. The Builder will assign to the Homeowner, without recourse, the manufacturer's warranty for all manufactured products that are covered by a manufacturer's warranty. Any rights that inure to the Homeowner provided under a manufacturer's warranty are the obligation of the manufacturer.

The Builder does not assume any of the obligations of the manufacturer resulting from a manufacturer's warranty. In no event shall there be Builder responsibility for any manufactured product that was installed in accordance with the manufacturer's instructions and specifications. appliances, fixtures, and equipment. This includes air conditioning units, attic fans, boilers, burglar alarms, carbon monoxide detectors, ceiling fans, central vacuum systems, doorbell systems, dishwashers, dryers, electronic air cleaners, exhaust fans, fire alarms, freezers, furnaces, garage door openers, garbage disposals, gas and electric meters, heat exchangers, heat pumps, humidifiers, intercoms, interior sprinkler systems, microwave ovens, oil tanks, outside lights or motion lights not attached to the Home, ranges and range hoods, refrigerators, sewage pumps, smoke detectors, solar collectors, space heaters, sump pumps, thermostats, trash compactors, washers, water pumps, water softeners, water heaters, whirlpool bathtubs, whole house fans, and similar items/appliances.

In no event shall there be Builder responsibility for any denial of warranty claim or otherwise by the manufacturer.

SECTION 9: HOW TO REQUEST WARRANTY PERFORMANCE FOR A WORKMANSHIP/MATERIALS AND/OR DELIVERY PORTION OF SYSTEMS DEFECT OR DEFICIENCY

If You believe Your Home has a defect/ deficiency covered under this Warranty, You must notify the Builder in writing, either through e-mail or certified mail, return receipt. Text messages are not acceptable. ***Notice cannot be initiated with a phone call.***

Your written notice for warranty performance must be received by Your Builder and the Administrator no later than fifteen (15) days after the expiration of the applicable Warranty Term of one (1) year for Workmanship/Materials and two (2) years for Delivery Portion of Systems (electrical, plumbing, and mechanical distribution systems). Notice to the Builder is not notice to GIC or the Administrator.

Written notice received more than fifteen (15) days after the expiration of the Warranty Term will be denied. Neither Your Builder nor GIC shall have any obligation to You under this Warranty. The time limits are a material condition of this Warranty. In addition, the defects/ deficiencies must occur within the Warranty Term to be covered.

- (1) The Builder will investigate and respond to Your request within thirty (30) days of receipt notice. You must provide the Builder a reasonable opportunity to inspect Your Home during normal business hours if the Builder requests such an opportunity. **Any repairs will be made during normal business hours.**
- (2) If the Builder does not respond to Your request for warranty performance within thirty (30) days, submit the Request for Warranty Performance Form from our website at: <https://www.strucsure.com/home-owners/file-a-claim>. If mailing, complete the Request for Warranty Performance Form at the back of this booklet and send it to the Administrator: StrucSure Home Warranty, LLC, Attn: Warranty Service Division, 6825 East Tennessee Avenue, Suite #410, Denver, CO 80224. Such notice must be received by the Administrator no later than fifteen (15) days after the expiration of the Warranty Term.
- (3) Once Your written notice has been received, the Administrator will review Your request for warranty performance in accordance with the provisions of this Warranty. The Administrator will investigate to determine whether Your Builder is unable to arbitrate due to death, insolvency, dissolution, or any other similar reason that renders Your Builder incapable of performing its Warranty obligations or is in default. Should the Administrator determine the Builder is unable to perform or is in default of the warranty obligations under the Workmanship/Materials Warranty during year one (1) and/or Delivery Portion of Systems warranty during the first two (2) years, GIC will then, through the use of the Administrator, investigate and determine the Builder's obligation under this Warranty. In the event GIC must investigate and determine the Builder's Warranty obligations, the following conditions apply:
 - You agree to provide the Administrator with any information or evidence in Your possession to support Your claim along with any inspector's, engineer's, and/or other expert's reports, photographs, videos, etc. related to and in support of Your claim. You also must provide the Administrator and GIC a reasonable opportunity to inspect Your Home (both the interior and/or exterior, as necessary) during normal business hours.
 - A \$300 non-refundable fee must be submitted. Submission of the \$300 fee does not guarantee coverage.

- You have an obligation to cooperate with the Builder, Administrator and GIC concerning the arbitration, inspection, investigation, repair, and claim settlement. Your failure to cooperate may jeopardize Your warranty coverage.


(4) Alternatively,

Within thirty (30) days following the Administrator's receipt of appropriate notice of request for warranty performance, the Administrator may review and mediate Your request by communicating with You, Your Builder, and/or GIC and any other individuals or entities who the Administrator believes possess pertinent information.

If, after thirty (30) days, the Administrator has not been able to successfully mediate Your request or Your Builder has not responded or at any earlier time when the Administrator believes that You and Your Builder are at an impasse, then the Administrator will notify You that Your request has become an unresolved warranty issue and that You may proceed to arbitration.

If a request for warranty performance during years one (1) for Workmanship/Materials and years one (1) and two (2) for Delivery Portion of Systems qualifies for coverage, the Builder or GIC, as applicable, has the right to choose to repair or replace or pay the reasonable cost of repair or replacement that do not meet Performance Standards and are not excluded from coverage.

FILING A WORKMANSHIP, MATERIALS OR SYSTEMS WARRANTY SERVICE REQUEST OR CLAIM

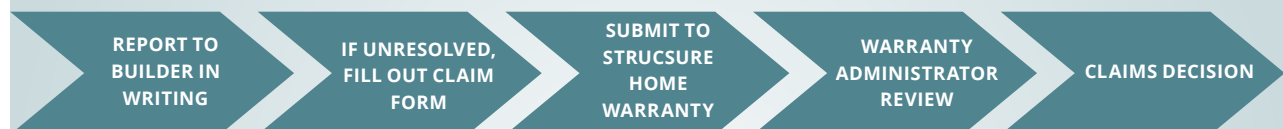


Before submitting a service request or claim, you must report the alleged defect(s) to your builder first and provide them a reasonable opportunity to address the issue(s). If unsuccessful, submit the Workmanship, Materials Or Systems Warranty Service Request Or Claim Form and attach complete written details of the defect(s) that form the basis of your claim. Be specific and include copies of any documents, pictures and any information you provided to your builder. Learn more or submit the Workmanship, Materials Or Systems Warranty Service Request Or Claim Form online at: <https://www.strucsure.com/homeowners/file-a-claim/> or E-mail to claims@strucsure.com OR Mail to **StrucSure Claims Department, 6825 E. Tennessee Ave., Suite #410, Denver, CO 80224**. Warranty Administrator will review your request and a claims decision will be determined.

SECTION 10: MAJOR STRUCTURAL DEFECT COVERAGE

This Warranty provides coverage for Major Structural Defect coverage for Ten-Years (10) from the effective date of the Warranty. The Major Structural Defect coverage is limited to the following Structural Components:

1. Foundation systems and footings,
2. Flooring framing systems,
3. Walls and partitions,
4. Roof framing systems,
5. Beams,
6. Headers,
7. Girders,
8. Lintels,
9. Columns, and
10. Masonry arches.

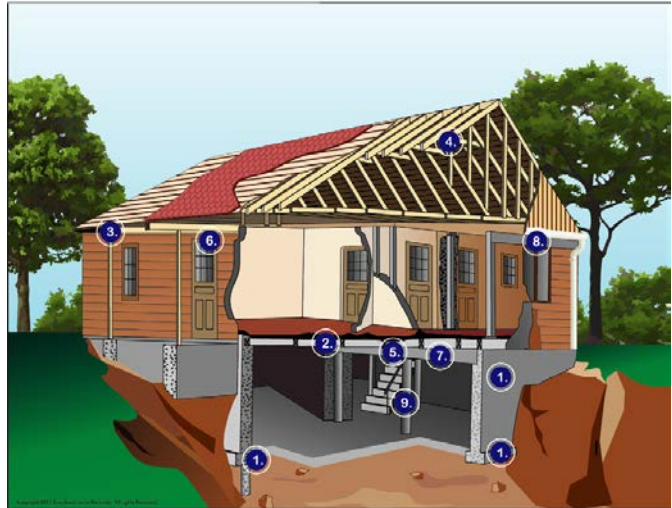

The following are some examples of non-load bearing elements of the Home, and **DO NOT** qualify for Major Structural Defect Coverage:

- (a) Non load-bearing partitions and walls,
- (b) Wall tile or paper, etc.,
- (c) Plaster, laths, or drywall,
- (d) Flooring and sub-flooring materials,
- (e) Brick, stucco, stone, or veneer,
- (f) Any type of exterior siding,
- (g) Roof shingles, tiles, sheathing, and tar paper,
- (h) Heating, cooling, ventilating, plumbing, electrical, and mechanical systems,
- (i) Appliances, fixtures, or items of equipment,
- (j) Doors, trim, cabinets, hardware, insulation, paint, and stains, and
- (k) Basement and other interior flooring, ground-supported concrete slabs.

The repair of a qualifying Major Structural Defect under this Warranty consists of and is limited to: 1) the repair of damage to the structural component that is necessary to restore its load-bearing function, 2) the repair of the non-structural components of the Home damaged by the Major Structural Defect, 3) the repair, removal, and replacement of only those surfaces, finishes, and coverings original to the Home that are damaged by the Major Structural Defect or repair.

Repair or replacement is **NOT** intended to restore the Home to a like new condition. If an improvement, fixture or property not constructed by the Builder is damaged or requires removal during the repair of any Warranted defect, it is Your sole responsibility, and not the responsibility of the Builder or GIC, to pay for the cost of repair or removal of such improvement, fixture or property. This Warranty does not cover special, incidental, indirect, or consequential damages and does not reimburse parties for their attorney's fees or costs.

All decisions concerning the repair of a Major Structural Defect, including, but not limited to, development and choice of a repair design (or "plan"), method of repair, execution of repairs, replacement of covered defective items, as well as all matters pertaining to the repair or replacement of all covered damage, belong to the sole discretion of GIC. GIC also has the right to choose to repair or replace or pay the reasonable cost of repair or replacement.

SECTION 11: HOW TO REPORT A MAJOR STRUCTURAL DEFECT CLAIM

If You believe Your Home has a Major Structural Defect, You must notify the Administrator in writing, either through e-mail or certified mail, return receipt. Text message are not acceptable. *Notice cannot be initiated with a phone call.* Your written Notice of a Major Structural Defect Form must be received by the Administrator within the 10 year Warranty Term. Notice to the Builder is not notice to GIC or the Administrator. Written notice received after the expiration of the Warranty Term will be denied. Neither Your Builder nor GIC shall have any obligation to You under this Warranty. The time limit is a material condition of this Warranty. In addition, the Major Structural Defect must occur within the Warranty Term to be covered.

Submit the Notice of a Major Structural Defect Form from our website at: <https://www.strucsure.com/home-owners/file-a-claim>. If mailing, send the Notice of Major Structural Defect Form to:

StrucSure Home Warranty, LLC,
Attn: Warranty Service Division
6825 East Tennessee Avenue, Suite #410
Denver, CO 80224

In addition, there is a \$300 non-refundable processing fee which needs to be submitted with the notice and made payable to Golden Insurance Company, Risk Retention Group.


Once Your written notice has been received, the Administrator will process and investigate Your Notice of Major Structural Defect. Upon completion of the Administrator's investigation, a determination will be rendered as to whether there is a qualifying Major Structural Defect.

You agree to provide the Administrator with any information or evidence in Your possession to support Your claim along with any inspector's, engineer's, and/or other expert's reports, photographs, videos, etc. related to and in support of Your claim. You also must provide the Administrator and GIC a reasonable opportunity to inspect Your Home (both the interior and/or exterior, as necessary) during normal business hours. Your failure to cooperate may jeopardize Your warranty coverage.

In connection with the investigation and determination of your claim, You may be sent a series of recommendations to be implemented. Failure to implement the recommendations may result in a denial of a future claim for benefits if the failure to implement the recommendations caused or contributed to a defect in the Home.

If the Administrator does not receive any communication from You within ninety (90) days following a denial of Your request for warranty performance, Your claim will be closed and the applicable Warranty Term will not be modified or extended. A closed file will require the filing of a new Notice of Major Structural Defect Form and submission of another processing fee.

FILING A MAJOR STRUCTURAL DEFECT WARRANTY CLAIM

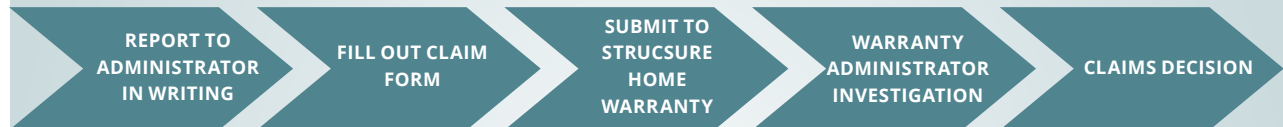

If you believe your home has a Major Structural Defect, You must notify the Warranty Administrator in writing, either through e-mail or certified mail, return receipt. Text message are not acceptable. Notice cannot be initiated with a phone call. Your written Notice of a Major Structural Defect Form must be received by the Administrator within the 10 year Warranty Term. Notice to the Builder is not notice to GIC or the Warranty Administrator. Written notice received after the expiration of the Warranty Term will be denied.

Learn more or submit the Notice of a Major Structural Defect Form from our website at: <https://www.strucsure.com/homeowners/file-a-claim/>

SECTION 12: CONDITIONS OF WARRANTY PERFORMANCE

In order for Your Builder and GIC to carry out their responsibilities under this Warranty, access to Your Home is required from time to time. The Builder, GIC and their designees shall be allowed full access during normal business operations for testing, inspection, and repairs. Failure to provide access for more than 30 calendar days, unless mutually agreed upon, after a written request is made will void the Warranty.

Any events that cause a delay in the performance of the warranty obligations of the Builder, the Administrator, and/or GIC, and that are beyond the control of the Builder, the Administrator, and/or GIC, shall excuse the Builder, the Administrator, and/or GIC from performing until the events causing the delay are remedied. Such events include, but are not limited to, concealed or unknown conditions such as soil conditions, unavoidable accidents or circumstances, encountering hazardous materials, damage caused by a utility company, acts of God or nature, pandemic, acts of the common enemy, fire, war, riot, civil commotion or sovereign conduct, material shortages or unusual material delivery delays, abnormal adverse weather conditions not reasonably anticipated, labor disputes, acts of terrorism, government action, and/or acts or omissions by You or a person or entity not a party to this Warranty. Such delay shall operate to extend the time period for performance but shall not act to extend the term(s) of warranty coverage(s).

If the Builder or GIC, as applicable, repairs, replaces, or pays You the reasonable cost to repair or replace, the Builder or GIC, as applicable, shall be subrogated to all Your rights of recovery against any person or entity. You must sign and deliver to the Builder, and GIC a full and unconditional release, in recordable form, of all legal obligations and rights to recovery (including subrogation rights) with respect to the warranted defects/deficiencies, and any condition arising from the warranted items. This must occur prior to payment for the reasonable cost of repair or replacement. You must execute and deliver any and all instruments and documents, and take any and all other actions necessary to secure such rights including, but not limited to, assignment of proceeds of any other insurance or other warranties to the Builder or GIC, as applicable. You shall do nothing to prejudice these rights of subrogation.

Any repair will be finished or touched up to match the surrounding area as closely as practical but not necessarily to a like-new condition. Imperfections and variations may exist and should be expected. A repair or action bringing a variance within the standard under this warranty shall not cause the period of the applicable warranty to be extended.

The Builder or GIC, as applicable, is not responsible for exact color, texture or finish matches when replacing or repairing materials, repainting areas, or when items or materials have been discontinued. Surfaces altered incident to any repair shall be finished or touched up to match the surrounding area as closely as practical. In connection with the repair of finish or surface material, such as paint, wallpaper, flooring or a hard surface, the Warrantor (Builder or GIC, as applicable) shall match the standard and grade as closely as reasonably possible. The (Builder or GIC, as applicable, shall attempt to match the finish, but shall not be responsible for discontinued patterns or materials, color variations, or shade variations. When the surface finish material must be replaced and the original material has been discontinued, the Builder or GIC, as applicable, is responsible for installing replacement material substantially similar in appearance to the original material. Repair or replacement is NOT intended to restore the Home to a like-new condition. Imperfections and variations may exist and should be expected. Coverage does not include refinishing of interior or exterior surfaces not damaged.

SECTION 13: DISPUTES MUST BE SUBMITTED TO ARBITRATION

Any and all claims, disputes and controversies by or between the Homeowner, the Builder, the Administrator, and/or GIC, or any combination of the foregoing arising out of, in connection with, or related to this Warranty, any alleged defect or deficiency in or to the subject Home or the real property on which the subject Home is situated, or the sale of the subject Home by the Builder, including, without limitation, any claim of breach of contract, negligent or intentional misrepresentation, or nondisclosure in the inducement, execution, or performance of any contract, including this arbitration agreement, breach of any alleged duty of good faith and fair dealing a violation of state, federal, or local law, statute, regulation, ordinance or rule, whether the claim must be arbitrated, or the validity and enforceability of this arbitration agreement, shall be settled by binding arbitration. Agreeing to arbitration means You are waiving Your right to a trial by a judge and/or a jury.

If an independent arbitration service cannot be mutually agreed upon by You, the Administrator, and the Builder or GIC, as applicable; then the arbitration shall be conducted by the American Arbitration Association pursuant to its Home Warranty Rules, or by DeMars & Associates, Ltd., or by Construction Dispute Resolution Services. This Warranty and arbitration provision involves and concerns interstate commerce and is governed by the Federal Arbitration Act, 9 U.S.C. 1 et seq., as amended (FAA), and any rules of the independent arbitration service employed by the parties to the arbitration. Should any conflict exist between the FAA and the rules of the independent arbitration service selected, the FAA shall control.

You understand that should You submit a request for arbitration, all administrative fees of the arbitration service and fees of the arbitrator shall be allocated to the parties as provided in the rules of the arbitration service, subject to the discretion of the arbitrator to reallocate such fees in the interests of justice.

This arbitration agreement shall inure to the benefit of, and be enforceable by, the Builder's subcontractors, agents, vendors, suppliers, design professionals, Insurers, and any other person alleged to be responsible for any defects/ deficiencies in or to the subject Home or the real property on which the subject Home is situated. Any party shall be entitled to recover reasonable attorney's fees and costs incurred in enforcing this arbitration agreement. The decision of the Arbitrator shall be final and binding and may be entered as a judgment in any State or Federal court of competent jurisdiction.

This arbitration agreement shall be deemed to be a self-executing arbitration agreement. Any disputes concerning the interpretation or the enforceability of this arbitration agreement, including, without limitation, its revocability or voidability for any cause, the scope of arbitration issues, class or collective arbitrability, and any defense based upon waiver, estoppel or laches, shall be decided by the Arbitrator.

The initiation of or participation by any party in any judicial proceeding concerning this arbitration agreement or any matter arbitrable hereunder shall not be deemed a waiver of the right to enforce this arbitration agreement, and, notwithstanding any applicable rule of law to the contrary, shall not be asserted or accepted as a reason for delay, refusal to participate in, or refusal to enforce this arbitration agreement.



The arbitration hearing shall take place at the Home unless the parties mutually agree to hold the arbitration at a different location.

The Builder or GIC, or Administrator shall have the right, in advance of the arbitration proceeding, to re-inspect any Home (both the interior and/or exterior, as necessary) that is the subject to the arbitration proceeding if the request for arbitration was made more than sixty (60) days following the last claim decision of the (Builder or GIC, as applicable) or Administrator concerning such Home.

No arbitration proceeding shall involve more than one single-family detached dwelling, more than one multi-dwelling unit, or one multi-unit building involving common elements. Any arbitration proceeding shall be on an individual basis and not in a class, consolidated, or representative action.

No arbitration award will be allowed to be confirmed or filed for confirmation in any court of law, regardless of the applicable rules of the arbitration, before the expiration of 90 days after the award is issued and/or signed by the arbitrator and all rules related to the modification, clarification or otherwise in the arbitration proceeding are expired.



PERFORMANCE STANDARDS FOR HOME COMPONENTS UNDER THE ONE-YEAR WORKMANSHIP/MATERIALS WARRANTY

This Section describes the Performance Standards for the various Workmanship and Materials elements or components of a Home as described. Unless otherwise stated under the various Performance Standards herein, if any such Performance Standard is not met, the Builder or GIC (as applicable) shall take such action as is necessary to bring the variance within the standard subject to the terms and conditions herein. The Builder or GIC (as applicable) will repair or replace those elements or components of a Home that do not meet these standards during the applicable warranty period.

(A) PERFORMANCE STANDARDS FOR FOUNDATIONS AND SLABS

(1) Performance Standards for Raised Floor Foundations or Crawl Spaces:

- (a) A crawl space shall be graded and drained properly to prevent surface run-off from accumulating deeper than 2 inches in areas 36 inches or larger in diameter. Water shall not enter into the basement or crawl space or seep through the basement floor.
- (b) The homeowner shall not modify improperly the existing grade or allow water from an irrigation system to cause water to accumulate excessively under the foundation. The homeowner shall not allow landscape plantings to interfere with proper drainage away from the foundation. The homeowner shall not use the crawl space for storage of any kind.

(2) Performance Standards for Concrete Slab Foundations, Excluding Finished Concrete Floors:

- (a) Concrete floor slabs in living spaces that are not otherwise designed with a slope for drainage, such as a laundry room, shall not have excessive pits, humps, depressions or unevenness equal to or exceeding 3/8 of an inch in any 32 inches and shall not have separations or cracks that equal or exceed 1/8 of an inch in width or 1/16 of an inch in vertical displacement.

- (b) Concrete slabs shall not have protruding objects, such as a nail, rebar, or wire mesh.
 - (c) Concrete portions of a raised-floor foundation should not have separations or cracks that equal or exceed 1/8 of an inch in width of 1/16 of an inch in vertical displacement.
 - (d) A separation in an expansion joint in a concrete slab shall not equal or exceed 1/4 of an inch vertically or one (1) inch horizontally from an adjoining section.
 - (e) Slab-on-ground foundations shall not have separations or cracks that equal or exceed 1/8 of an inch in width or 1/16 of an inch in vertical displacement. Cracks or chips at the corners of slab-on-ground foundations shall not be considered as violations of this performance standard.
 - (f) Efflorescence is a typical condition caused by moisture reacting with soluble salts in concrete and forming harmless carbonate compounds. It is evidenced by the presence of a white film or powder on the surface of the concrete. If the efflorescence is caused solely by water leakage (actual flow and accumulation), the contractor will eliminate the leaks into the structure.
- (3) Performance Standards for Exterior Concrete Including Patios, Stem Walls, Driveways, Stairs Or Walkways:
- (a) Concrete corners or edges shall not be damaged excessively due to construction activities.
 - (b) A crack in exterior concrete shall not cause vertical displacement equal to or in excess of 1/4 of an inch or horizontal separation equal to or excess of 1/4 of an inch.
 - (c) The homeowner shall not over-water surrounding soil or allow the surrounding soil to become excessively dry. The homeowner shall not allow heavy equipment to be placed on the concrete.
 - (d) The finish on exterior concrete shall not be excessively smooth, so that the surface becomes slippery. A concrete surface that has been designed to be smooth is excepted from this performance standard.
 - (e) Exterior concrete shall not contain a protruding object, such as a nail, rebar, or wire mesh.
 - (f) A separation in an expansion joint in an exterior concrete shall not equal or exceed 1/2 of an inch vertically from an adjoining section or one (1) inch horizontally, including joint material.
 - (g) A separation in a control joint shall not equal or exceed 1/4 of an inch vertically or 1/2 of an inch horizontally from an adjoining section.
 - (h) Concrete stair steepness and dimensions, such as tread width, riser height, landing size and stairway width shall comply with the Code such that they perform their intended function without posing a safety risk.
 - (i) Handrails shall remain securely attached to concrete stairs.
 - (j) Concrete stairs or stoops shall not settle or heave in an amount equal to or exceeding 3/8 of an inch. Concrete stairs or stoops shall not separate from the home in an amount equal to or exceeding one (1) inch, including joint material.
 - (k) A driveway will not have a negative slope unless due to site conditions, unless it has swales or drains properly installed to prevent water from entering into the garage. If a driveway is sloped such that it allows water to enter the garage in normal weather conditions, the Builder shall take such action as is necessary to prevent water from entering the garage due to driveway slope.

- (l) Non-structural concrete floor slabs in detached garages, carports or porte-cocheres shall not have excessive pits, depressions, deterioration or unevenness equal to or exceeding $\frac{3}{8}$ of an inch in any 32 inches. Separations or cracks in these slabs should not equal or exceed $\frac{3}{16}$ of an inch in width, except at expansion joint, or $\frac{1}{8}$ of an inch in vertical displacement.
- (m) Plaster over concrete shall not flake off more than one (1) square foot in one spot within 36 square inches or more than three (3) feet over the entire surface of the Home.

(B) PERFORMANCE STANDARDS FOR FRAMING

(1) Building and Performance Standard for Walls:

- (a) Walls shall not bow or have depressions that equal or exceed $\frac{1}{4}$ of an inch out of line within any 32-inch horizontal measurement as measured from the center of the bow or depression or $\frac{1}{2}$ of an inch within any eight-foot vertical measurement.
- (b) Walls shall be level, plumb and square to all adjoining openings or other walls within $\frac{3}{8}$ of an inch in any 32-inch measurement.
- (c) A crack in a beam or a post shall not equal or exceed $\frac{1}{2}$ of an inch in width at any point along the length of the crack.
- (d) A non-structural post or beam shall not have a warp or twist equal or exceeding one (1) inch in eight (8) feet of length. Warping or twisting shall not damage the beam pocket.
- (e) Exterior sheathing shall not delaminate or swell.
 - i. The homeowner shall not make penetrations in the exterior finish of a wall that allow moisture to come in contact with the exterior sheathing.
- (f) An exterior moisture barrier shall not allow an accumulation of moisture inside the barrier.
 - i. The homeowner shall not make penetrations through the exterior moisture barrier that permit the introduction of moisture inside the barrier.

(2) Performance Standards for Ceilings:

- (a) A ceiling shall not bow or have depressions that equal or exceed $\frac{1}{2}$ of an inch out of line within a 32-inch measurement as measured from the center of the bow or depression running parallel with a ceiling joist.

(3) Performance Standards for Sub-Floors:

- (a) Under normal residential use, the floor shall not make excessive squeaking or popping sounds.
- (b) Sub-floors shall not delaminate or swell to the extent that it causes observable physical damage to the floor covering or visually affects the appearance of the floor covering. Exposed structural flooring, where the structural flooring is used as the finished flooring, is excluded from the standard stated in this subsection.
- (c) Sub-flooring shall not have excessive humps, ridges, or depressions within any room that equals or exceeds $\frac{3}{8}$ of an inch in any 32-inch direction.

(4) Performance Standards for Stairs:

- (a) Stair steepness and dimensions such as tread width, riser height, landing size and stairway width, shall comply with the Code.
- (b) Under normal residential use, stairs shall not make excessive squeaking or popping sounds.

(C) PERFORMANCE STANDARDS FOR DRYWALL**(1) Performance Standards for Drywall:**

- (a) A drywall surface shall not have a bow or depression that equals or exceeds 1/4 of an inch out of line within any 32-inch horizontal measurement as measured from the center of the bow or depression or 1/2 of an inch within any eight foot vertical measurement; such measurement to be made utilizing a straight-edge that is held reasonably parallel to the plane of the wall or ceiling surface.
- (b) A ceiling made of drywall shall not have bows or depressions that equal or exceed 1/2 of an inch out of line within a 32-inch measurement as measured from the center of the bow or depression running parallel with a ceiling joist or within 1/2 of an inch deviation from the plane of the ceiling within any eight foot measurement; such measurement to be made utilizing a straight-edge that is held reasonably parallel to the plane of the wall or ceiling surface.
- (c) A drywall surface shall not crack such that any crack equals or exceeds 1/32 of an inch in width at any point along the length of the crack.
- (d) Crowning at a drywall joint shall not equal or exceed 1/4 of an inch within a twelve-inch measurement centered over the drywall joint. Crowning occurs when a drywall joint is higher than the plane of the drywall board on each side.
- (e) A drywall surface shall not have surface imperfections such as blisters, cracked corner beads, seam lines, excess joint compound or trowel marks that are visible from a distance of six (6) feet or more in normal light. Minor variations in the 'splatter' or 'drag' appearance of texture that are the result of the original installation or subsequent repair work, visible from any distance, are not considered to be Warrantable defects under this warranty.
- (f) A drywall surface shall not be out of level (horizontal), plumb (vertical) or square (perpendicular at a 90-degree angle) such that there are variations in those measurements to wall or surface edges at any opening, corner, sill, shelf, etc. shall not equal or exceed 3/8 of an inch in any 32-inch measurement along the wall or surface.
 - i. This standard shall not apply to remodeling projects where existing conditions do not permit the Builder to achieve the Performance Standard. At or about the time of discovery of such a pre-existing condition, a remodeler shall notify the homeowner, in writing, of any existing condition that prevents achievement of the standard. Accumulations of drywall compound in wall corners, at wallboard joints or outside corners, and at door, window or built-in cabinet openings, may not be the sole determinant that a wall or ceiling section is out of plumb or square.
- (g) Nails or screws shall not be visible in a drywall surface from a distance of six (6) feet under normal lighting conditions.

(D) PERFORMANCE STANDARDS FOR INSULATION**(1) Performance Standards for Insulation:**

- (a) Insulation shall be installed in the walls, ceilings and floors of a home in accordance with the building plan specifications, manufacturer's instructions, and the Code.
- (b) Blown insulation in the attic shall not displace or settle so that it reduces the R-value below manufacturer's specifications, the building plans and the Code.

- (c) A gap equal to or in excess of 1/4 of an inch between insulation batts or a gap between insulation batts and framing members is not permitted.
- (d) In vented attics, insulation shall not cover or block a soffit vent to the extent that it blocks the free flow of air.
- (e) In unvented attics, insulation shall be installed in compliance with Code.

(E) PERFORMANCE STANDARDS FOR EXTERIOR SIDING AND TRIM

(1) Performance Standards for Exterior Siding:

- (a) Exterior siding shall be installed in accordance with manufacturer's instructions.
- (b) Exterior siding shall be equally spaced and properly aligned. Horizontal siding shall not equal or exceed 1/2 of an inch off parallel with the bottom course or 1/4 of an inch off parallel with the adjacent course from corner to corner.
- (c) Siding shall not gap or bow. A siding end joint shall not have a gap that leaks or that equals or exceeds 1/4 of an inch in width. Siding end joint gaps shall be caulked. A bow in siding shall not equal or exceed 3/8 of an inch out of line in a 32-inch measurement.
- (d) Nails shall not protrude from the finished surface of siding but nail heads may be visible on some products where allowed by the manufacturer's specifications.
- (e) Siding shall not have a nail stain.
- (f) Siding and siding knots shall not become loose or fall off.
- (g) Siding shall not delaminate.
- (h) Siding shall not cup in an amount equal to or exceeding 1/4 of an inch in a six-foot run.
- (i) Siding shall not have cracks or splits that equal or exceed 1/8 of an inch in width.

(2) Performance Standards for Exterior Trim:

- (a) Exterior trim shall be installed in accordance with manufacturer's instructions.
- (b) A joint between two trim pieces or between a trim piece and the adjoining material shall not have a separation that is equal to or exceeding 1/4 of an inch in width. All trim joints shall be caulked and shall not leak.
- (c) Exterior trim and eave block shall not warp in an amount equal to or exceeding 1/2 of an inch in an eight-foot run.
- (d) Exterior trim and eave block shall not cup in an amount equal to or in excess of 1/4 of an inch in a six-foot run.
- (e) Exterior trim and eave block shall not have cracks or splits equal to or in excess of 1/8 of an inch in average width.
- (f) Trim shall not have nails that completely protrude through the finished surface of the trim but nail heads may be visible on some products.
 - i. Some products specify that the nails be flush with the trim surface. When these products are used, visible nail heads are not considered protruding nails as long as they are painted over.
- (g) Trim shall not have a nail stain.

(F) PERFORMANCE STANDARDS FOR MASONRY INCLUDING BRICK, BLOCK AND STONE**(1) Performance Standards for Masonry including Brick, Block and Stone:**

- (a) A masonry wall shall not bow in an amount equal to or in excess of one inch when measured from the base to the top of the wall or tilt such that the center of gravity of the wall falls outside the middle third of the base of the wall. The standard set forth in this subsection does not apply to natural stone products.
- (b) A masonry unit or mortar shall not be broken or loose.
- (c) A masonry mortar crack shall not equal or exceed 1/8 of an inch in width.
- (d) A masonry unit or mortar shall not deteriorate.
- (e) Masonry shall not have dirt, stain, or debris on the surface due to construction activities.
- (f) A gap between masonry and adjacent material shall not equal or exceed 1/4 of an inch in average width and all such gaps shall be caulked.
- (g) Mortar shall not obstruct a functional opening, such as a vent, weep hole or plumbing cleanout.
 - i. The homeowner shall not put any material into weep holes. Weep holes are an integral part of the wall drainage system and must remain unobstructed.

(G) PERFORMANCE STANDARDS FOR STUCCO**(1) Performance Standards for Stucco:**

- (a) Stucco surfaces shall not be excessively bowed, uneven, or wavy.
 - i. This standard shall not apply to decorative finishes.
- (b) Stucco shall not be broken or loose.
- (c) Stucco shall not have cracks that equal or exceed 1/8 of an inch in width at any point along the length of the crack.
 - i. The Builder shall not be responsible for repairing cracks in stucco caused by the homeowner's actions, including but not limited to periodic maintenance, caulking, painting, diversion of water onto the surface of the stucco, the attachment of devices to the stucco surface such as, but not limited to, patio covers, plant holders, awnings and hose racks.
- (d) The homeowner shall not allow water from irrigation systems to contact stucco finishes.
- (e) Stucco shall not have dirt, stain, or debris on surface due to construction activities.
- (f) Stucco surfaces shall not have imperfections that are visible from a distance of six (6) feet under normal lighting conditions that disrupt the overall uniformity of the finished pattern.
- (g) The lath shall not be exposed.
- (h) A separation between the stucco joints shall not equal or exceed 1/16 of an inch in width.
- (i) A separation between a stucco surface and adjacent material shall not equal or exceed 1/4 of an inch in width and all separations shall be caulked.
- (j) Stucco shall not obstruct a functional opening, such as a vent, weep hole or plumbing cleanout.
- (k) Stucco screed shall have a minimum clearance of at least four (4) inches above the soil or landscape surface and at least two (2) inches above any paved surface.

- (l) Exterior Insulation Finish Systems (EIFS) stucco screed shall clear any unpaved surface by at least six (6) inches.

(H) PERFORMANCE STANDARDS FOR ROOFS

(1) Performance Standards for Roofs:

- (a) Flashing shall prevent water penetration.
 - i. The Builder shall not be responsible for leaks caused by extreme weather.
- (b) The roof shall not leak.
 - i. The Builder shall not be responsible for leaks caused by extreme weather.
 - ii. The homeowner shall perform periodic maintenance to prevent leaks due to build-up of debris, snow, or ice. The homeowner shall take such action as is necessary to prevent downspouts and gutters from becoming clogged.
- (c) A vent, louver or other installed attic opening shall not leak.
 - i. The Builder shall not be responsible for leaks caused by Extreme Weather Conditions.
- (d) A gutter or downspout shall not leak or retain standing water. After cessation of rainfall, standing water in an unobstructed gutter shall not equal or exceed 1/2 of an inch in depth.
 - i. The Builder shall not be responsible for leaks caused by Extreme Weather Conditions.
 - ii. The homeowner shall maintain and clean gutters and downspouts to prevent buildup of debris or other obstructions.
- (e) Shingles, tiles, metal, or other roofing materials shall not become loose or fall off in wind speeds less than those set forth in the manufacturer's specifications.
- (f) A skylight shall not leak.
- (g) Water shall drain from a built-up roof within two hours after cessation of rainfall. The standard does not require that the roof dry completely within the time period.
- (h) A roof tile shall not be cracked or broken. No shingle shall be broken so that it detracts from the overall appearance of the Home.
- (i) A pipe, vent, fireplace, or other object designed to penetrate the roof shall not be located within the area of roof valley centerline without proper "cricketing" or other Code-approved water diversion methods.
- (j) The exterior moisture barrier of the roof shall not allow moisture penetration.
 - i. The homeowner shall not make penetrations through exterior moisture barrier of the roof.

(I) PERFORMANCE STANDARDS FOR DOORS AND WINDOWS

(1) Performance Standards for Both Doors and Windows:

- (a) When closed, a door or window shall not allow excessive infiltration of air or dust.
- (b) When closed, a door or window shall not allow excessive accumulation of moisture inside the door or window.
 - i. The homeowner shall keep weep holes on windows and doors free of dirt buildup and debris, thereby allowing water to drain properly.

- ii. Most door and window assemblies are designed to open, close and weep moisture in order to allow condensation or minor penetration by the elements to drain outside.
- (c) Glass in doors and windows shall not be broken due to improper installation or construction activities.
- (d) A screen in a door or window shall fit properly and shall not be torn or damaged due to construction activities. A screen shall not have a gap equal to or exceeding 1/4 of an inch between the screen frame and the window frame.
- (e) There shall be no condensation between window and door panes in a sealed insulated glass unit.
 - i. The homeowner shall not apply a tinted window film or coating to window or door panes in sealed insulated glass units.
- (f) A door or window latch or lock shall close securely and shall not be loose or rattle.
- (g) A door or window shall operate easily and smoothly and shall not require excessive pressure when opening or closing.
- (h) A door or window shall be painted or stained according to the manufacturer's specifications.
- (2) Performance Standards for Windows:
 - (a) A double hung window shall not move more than two (2) inches when put in an open position.
- (3) Performance Standards for Doors:
 - (a) A sliding door and door screen shall stay on track.
 - i. The homeowner shall clean and lubricate sliding door or door screen hardware as necessary.
 - (b) The spacing between an interior door bottom and original floor covering, except closet doors, shall not exceed 1.5 inches and shall be at least 1/2 of an inch. The spacing between an interior closet door bottom and original floor covering shall not exceed two (2) inches and shall be at least 1/2 of an inch.
 - (c) A door shall not delaminate.
 - (d) A door panel shall not split so that light from the other side is visible.
 - (e) A door shall open and close without binding.
 - (f) A door shall not warp to the extent that it becomes inoperable. A warp in a door panel shall not equal or exceed 1/4 of an inch from original dimension measured vertically, horizontally, or diagonally from corner to corner.
 - (g) A storm door shall open and close properly and shall fit properly.
 - (h) When a door is placed in an open position, it shall remain in the position it was placed, unless the movement is caused by airflow.
 - (i) A metal door shall not be dented or scratched due to construction activities.
- (4) Performance Standards for Garage Doors:
 - (a) A metal garage door shall not be dented or scratched due to construction activities.

- (b) A garage door opener, if provided, shall operate properly in accordance with manufacturer's specifications.
 - i. The homeowner shall maintain tracks, rollers and chains and shall not block or bump sensors to electric garage door openers.
- (c) A garage door shall not allow excessive water to enter the garage and the gap around the garage door shall not equal or exceed 1/2 of an inch in width.
- (d) A garage door spring shall operate properly and shall not lose appreciable tension, break or be undersized.
- (e) A garage door shall remain in place at any open position, operate smoothly and not be off track.

(J) PERFORMANCE STANDARDS FOR INTERIOR FLOORING

This subsection includes Performance Standards for Carpet, Vinyl Flooring and Wood Flooring. Performance Standards for ceramic tile, flagstone, marble, granite, slate, quarry tile other hard surface floors, and finished concrete floors, are included in subsection L.

- (1) Performance Standards for Carpet:
 - (a) Carpet shall not wrinkle and shall remain tight, lay flat and be securely fastened.
 - (b) Carpet seams may be visible but shall be smooth without a gap or overlap.
 - (c) Carpet shall not be stained or spotted due to construction activities.
- (2) Performance Standards for Finished Concrete Floors:
 - (a) A finished slab, located in a living space that is not otherwise designed for drainage, shall not have pits, humps, depressions, or unevenness that equals or exceeds 3/8 of an inch in any 32 inches.
 - i. Finished concrete slabs in living spaces that are designed for drainage, such as a laundry room, are excepted from the standards stated in this subsection.
 - (b) Finished concrete slabs in living spaces shall not have separations, including joints, and cracks that equal or exceed 1/8 of an inch in width or 1/16 of an inch in vertical displacement.
- (3) Performance Standards for Wood Flooring:
 - (a) Wood flooring shall not have excessive humps, depressions or unevenness that equals or exceeds 3/8 of an inch in any 32-inch direction within any room.
 - (b) Wood flooring shall remain securely attached to the foundation or sub-floor unless the wood flooring is designed to be installed without nails, glue, adhesives, or fasteners.
 - (c) Wood flooring shall not have open joints and separations that equal or exceed 1/8 of an inch.
 - i. These standards do not apply to non-hardwood species that contain greater moisture and may shrink after installation or structural floors that are designed to serve as the finished floor. If the floor is designed as a structural finish floor, the Builder must provide a written explanation of the characteristics of that floor to the homeowner prior to the execution of the contract or installation of the product, whichever occurs later.
 - (d) Strips of floorboards shall not cup in an amount that equals or exceeds 1/16 of an inch in height in a three (3) inch distance when measured perpendicular to the length of the board.

- i. This standard does not apply to non-hardwood species that typically shrink after installation or structural floors that are designed to serve as the finished floor. If the floor is designed as a structural finish floor, the Builder must provide a written explanation of the characteristics of that floor to the homeowner.
- (e) Unless installed as a specialty feature, wood flooring shall not have excessive shade changes or discoloration due to the construction activities of the Builder.
- (f) Unless installed as a specialty feature, wood flooring shall not be stained, spotted, or scratched due to construction activities of the Builder.

(K) PERFORMANCE STANDARDS FOR VINYL FLOORING

(1) Performance Standards for Vinyl Flooring:

- (a) Vinyl flooring shall be installed square to the most visible wall and shall not vary by 1/4 of an inch in any six (6) foot run.
- (b) The seam alignment in vinyl flooring shall not vary such that the pattern is out of alignment in an amount that equals or exceeds 1/8 of an inch.
- (c) Vinyl flooring shall remain securely attached to the foundation or sub-floor.
- (d) A vinyl floor shall not have a depression that equals or exceeds 1/2 of an inch in any six (6) foot run. If a vinyl floor has a depression that exceeds the standard stated in this paragraph and the depression is due to construction activities, the Builder shall take such action as is necessary to bring the variance within the standard.
- (e) A vinyl floor shall not have a ridge that equals or exceeds 1/2 of an inch when measured as provided in this subsection. The ridge measurement shall be made by measuring the gap created when a six (6) foot straight edge is placed tightly three (3) inches on each side of the defect and the gap is measured between the floor and the straight edge at the other end. If a vinyl floor has a ridge that fails to comply with the standard stated in this paragraph and the ridge is due to construction activities, the Builder shall take such action as is necessary to bring the variance within the standard.
- (f) Vinyl floor shall not be discolored, stained, or spotted due to the construction activities of the Builder.
- (g) Vinyl flooring shall not be scratched, gouged, cut, or torn due to construction activities.
- (h) Debris, sub-floor seams, nails and/or screws shall not be detectable under the vinyl floor from a distance of three (3) feet or more in normal light.
- (i) Sub-flooring shall not cause vinyl flooring to rupture.
- (j) A seam in vinyl flooring shall not have a separation that equals or exceeds 1/16 of an inch in width. Where dissimilar materials abut, there shall not be a gap equal to or greater than 1/8 of an inch.

(L) PERFORMANCE STANDARDS FOR HARD SURFACES, INCLUDING CERAMIC TILE, FLAGSTONE, MARBLE, GRANITE, SLATE, QUARRY TILE, FINISHED CONCRETE OR OTHER HARD SURFACES

(1) Performance Standards for Hard Surfaces Generally:

- (a) A hard surface shall not break or crack due to construction activities.
- (b) A hard surface shall remain secured to the substrate.

- (c) A surface imperfection in a hard surface floor shall not be visible from a distance of three (3) feet or more in normal light. A surface imperfection in non-floor hard surface shall not be visible from a distance of two (2) feet or more in normal light. If a hard surface fails to meet the standards stated in this paragraph due to construction activities, the Builder shall take such action as is necessary to bring the variance within the standard.
 - (d) Color variations between field hard surfaces and trim hard surfaces should not vary excessively due to construction activities.
 - i. Natural products such as flagstone, marble, granite, slate, and other quarry tile may have color variation.
 - (e) Hard surface areas shall not leak.
 - (f) The surfaces of two adjacent hard surfaces shall not vary in an amount equal to or exceeding 1/16 of an inch displacement at a joint (lippage) in addition to the actual manufacturing variations of the hard surface, such as warpage or dimensional differences in the hard surfaces, including thickness. If a joint between two hard surfaces fails to meet the Performance Standard stated in this paragraph (excluding trim pieces), the Builder shall take such action as is necessary to bring the variance within the standard.
 - (g) Hard surface layout or grout line shall not be excessively irregular.
 - i. Natural products such as flagstone, marble, granite, slate, and other quarry tile will have size variations that may create irregular layouts or grout lines.
 - (h) Hard surface countertops shall be level to within 1/4 of an inch in any six (6) foot measurement.
 - (i) Hard surface floors located in a living space that is not otherwise designed for drainage, shall not have pits, depressions, or unevenness that equals or exceeds 3/8 of an inch in any 32 inches.
 - i. Finished hard surface floors located in living spaces that are designed for drainage, such as a laundry room, are excepted from the standards stated in this subsection.
- (2) Performance Standards for Grout:
- (a) Grout shall not deteriorate.
 - (b) Cracks in grout shall not exceed 1/16 of an inch in width.
 - (c) Grout shall not change shade or become excessively discolored due to construction activities.
- (3) Performance Standards for Concrete Countertops:
- (a) A concrete countertop shall not have excessive pits, humps, depressions, or unevenness that equal or exceed 1/8 of an inch in any 32-inch measurement.
 - (b) A concrete countertop shall not have separations or cracks equal to or exceeding 1/16 of an inch in width or 1/64 of an inch in vertical displacement.
 - (c) A finished concrete countertop shall not be stained, spotted, or scratched due to construction activities.
 - (d) A concrete countertop shall not have a chipped edge that extends beyond 1/16 of an inch from the edge of the countertop due to construction activities.
 - (e) A concrete countertop shall not change shade or become excessively discolored due to construction activities.

(M) PERFORMANCE STANDARDS FOR PAINTING, STAIN, AND WALL COVERINGS

- (1) Performance Standards for Caulking:
 - (a) Interior caulking shall not deteriorate or crack excessively.
- (2) Performance Standards for Painting and Stain:
 - (a) Paint or stain shall not have excessive color, shade, or sheen variation.
 - i. This standard shall not apply to stained woodwork.
 - (b) Paint shall cover all intended surfaces so that unpainted areas shall not show through paint when viewed from a distance of six (6) feet in normal light.
 - (c) Interior paint or stain shall not deteriorate.
 - (d) Exterior paint or stain shall not deteriorate excessively.
 - (e) Paint over-spray shall not exist on any surface for which it was not intended.
 - (f) Interior varnish, polyurethane or lacquer finish shall not deteriorate.
 - (g) Exterior varnish, polyurethane or lacquer finishes shall not deteriorate excessively.
 - i. Exterior varnish, polyurethane or lacquer finishes that are subject to direct sunlight are excluded from this standard.
 - (h) Interior painted, varnished, or finished surface shall not be scratched, dented, nicked or gouged due to construction activities.
 - (i) A paint product shall meet manufacturer's specifications for washability and/or scrubability.
- (3) Performance Standards for Wall Coverings:
 - (a) A wall covering shall be properly secured to the wall surface and shall not peel or bubble.
 - (b) Pattern repeats in wall coverings shall match. Wall coverings shall be installed square to the most visible wall. Pattern repeats shall not vary in an amount equal to or exceeding 1/4 of an inch in any six (6) foot run.
 - (c) A wall covering seam shall not separate or gap.
 - (d) Lumps or ridges in a wall covering shall not be detectable from a distance of six (6) feet or more in normal light.
 - (e) Wall coverings shall not be discolored, stained, or spotted due to construction activities.
 - (f) Wall coverings shall not be scratched, gouged, cut, or torn due to construction activities.
 - (g) Wall coverings shall meet manufacturer's specifications for washability and/or scrubability.

(N) PERFORMANCE STANDARDS FOR PLUMBING

- (1) Performance Standards for Plumbing Accessories:
 - (a) A fixture surface shall not have a chip, crack, dent or scratch due to construction activities.
 - (b) A fixture shall not tarnish, or have blemishes or stains unless installed as a specialty feature.
 - i. Fixture finishes that are tarnished, blemished, or stained due to high iron, manganese or other mineral content in water are excluded from this standard.
 - (c) A fixture or fixture fastener shall not corrode.

- i. A Builder is not responsible for corrosion caused by factors beyond the manufacturer's or the Builder's control, including the homeowner's use of corrosive chemicals or cleaners or corrosion caused by water content.
 - (d) A decorative gas appliance shall be installed in accordance with manufacturer's specifications and when so installed shall function in accordance with manufacturer's representations.
 - (e) Fixtures shall be secure and not loose.
 - i. The homeowner shall not exert excessive force on a fixture.
 - (f) A fixture stopper shall operate properly and shall retain water in accordance with the manufacturer's specifications.
 - (g) The toilet equipment shall not allow water to run continuously.
 - i. If toilet equipment allows water to run continuously, the homeowner shall shut off the water supply or take such action as is necessary to avoid damage to the home.
 - (h) A toilet shall be installed and perform in accordance with the manufacturer's specifications.
 - i. In the event of water spillage, the homeowner shall shut off the water supply and take such action as is necessary to avoid damage to the home.
 - (i) A tub or shower pan shall not crack.
 - (j) A tub or shower pan shall not squeak excessively.
 - (k) A water heater shall be installed and secured according to the manufacturer's specifications and the Code.
 - (l) A waste disposal unit shall be installed and operate according to the manufacturer's specifications.
 - (m) A faucet or fixture shall not drip or leak.
 - i. This standard does not include drips or leaks due to debris or minerals from the water source, unless it is due to construction activities.
 - (n) A sump pump shall be installed in accordance with the manufacturer's specifications and shall operate properly when so installed.
 - (o) Coverage under this subsection (N)(1) is limited to repair or replacement of the plumbing accessory itself. Coverage includes repair or replace any surface necessarily damaged in accessing the plumbing accessory.
 - (p) Any Major Structural Defect resulting, arising, or in any way stemming from an element that fails to meet this performance standard is excluded from warranty coverage as set forth in Section 7 of this Warranty.
- (2) Performance Standards for Pipes and Vents:
- (a) A sewer gas odor originating from the plumbing system shall not be detectable inside the home under conditions of normal residential use.
 - i. The homeowner shall keep plumbing traps filled with water.
 - (b) A vent stack shall be free from blockage and shall allow odor to exit the Home.
 - (c) A water pipe shall not make excessive noise such as banging or hammering repeatedly.
 - i. A water pipe subject to expansion or contraction of the pipe as warm or cool water flows through

the pipe may cause a "ticking" sound temporarily. The standard stated in this subsection does not require a Builder to remove all noise attributable to water flow and pipe expansion.

(O) PERFORMANCE STANDARDS FOR HEATING, COOLING AND VENTILATION

(1) Performance Standards for Heating and Cooling:

- (a) A condensation line shall not be obstructed due to construction activities.
 - i. The homeowner shall periodically check for the free flow of condensate (water) from the line and clear the line when necessary.
- (b) A drip pan and drain line shall be installed under a horizontal air handler as per the Code.
 - i. The homeowner shall periodically check for the free flow of condensate (water) from the line and clear the line when necessary.
- (c) Insulation shall completely encase the refrigerant line according to Code.
 - i. The homeowner shall ensure that insulation on the refrigerant line is not damaged or cut due to home maintenance or landscape work.
- (d) An exterior compressor unit shall be installed in accordance with the manufacturer's instructions and specifications. The bottom of the exterior compressor unit support shall not be below ground level.
 - i. The homeowner shall ensure that settlement of the exterior compressor unit pad does not occur due to home maintenance, landscape work or excessive water from irrigation.

(2) Performance Standards for Venting:

- (a) An appliance shall be vented according to the manufacturer's specifications.
- (b) Back draft dampers shall be installed and function according to the manufacturer's specifications.

(3) Performance Standards for Ductwork:

- (a) Ductwork shall not make excessive noise.
 - i. The flow of air, including its velocity, or the expansion of ductwork from heating and cooling may cause common "ticking" or "crackling" sounds. The Builder shall have no responsibility for correction in such cases.
 - ii. The homeowner shall not place any object on the ductwork.

(P) PERFORMANCE STANDARDS FOR ELECTRICAL SYSTEMS AND FIXTURES

(1) Performance Standards for Electrical Systems and Fixtures:

- (a) Excessive air infiltration shall not occur around electrical system components or fixtures.
- (b) A fixture or trim plate shall not be chipped, cracked, dented, or scratched due to construction activities.
- (c) A fixture or trim plate finish shall not be tarnished, blemished, or stained due to construction activities.
- (d) A fixture, electrical box or trim plate shall be installed in accordance with the Code and shall be plumb and level.

- (e) Fixtures, such as lights, fans and appliances shall operate properly when installed in accordance with the manufacturer's specifications.
- (f) A smoke detector shall operate according to the manufacturer's specifications and shall be installed in accordance with the Code.
- (g) An exhaust fan shall operate within the manufacturer's specified noise level.
- (h) A carbon monoxide detector shall operate according to the manufacturer's specifications and shall be installed in accordance with the Code.

(Q) PERFORMANCE STANDARDS FOR INTERIOR TRIM

(1) Performance Standards for Trim:

- (a) An interior trim joint separation shall not equal or exceed 1/8 of an inch in width or shall not separate from adjacent surfaces equal to or in excess of 1/8 of an inch and all joints shall be caulked or puttied.
- (b) The interior trim shall not have surface damage, such as scratches, chips, dents, gouges, splits, cracks, warping or cupping that is visible from a distance of six (6) feet or more in normal light due to construction activities.
- (c) A hammer mark on trim shall not be visible from a distance of six (6) feet or more when viewed in normal light.
- (d) A nail or nail hole in interior trim shall not be visible from a distance of six (6) feet or more when viewed in normal light.

(R) PERFORMANCE STANDARDS FOR SHELVING

(1) Performance Standards for Shelving:

- (a) Shelving, rods and end supports shall be installed in accordance with the measurements stated in this subsection. The length of a closet rod shall not be shorter than the actual distance between the end supports in an amount equal to or exceeding 1/4 of an inch. The length of a shelf shall not be shorter than the actual distance between the supporting walls by an amount equal to or exceeding 1/4 of an inch. End supports shall be securely mounted.

(S) PERFORMANCE STANDARDS FOR CABINET DOORS

(1) Performance Standards for Cabinet Doors:

- (a) Cabinet doors shall open and close with reasonable ease. Cabinet doors shall be even and shall not warp more than 1/4 of an inch when measured from the face to the point of the furthestmost point of the door or drawer front when closed.
 - i. Some warping, cupping, bowing, or twisting is normally caused by surface temperature and humidity changes.

(T) PERFORMANCE STANDARDS FOR MIRRORS, INTERIOR GLASS AND SHOWER DOORS

(1) Performance Standards for Mirrors, Interior Glass, and Shower Doors:

- (a) A mirror, interior glass or shower door shall not be loose and shall be securely mounted or attached to the supporting surface. Fixtures such as towel bars or door handles shall be securely mounted.

- (b) A mirror, interior glass or shower door shall not be damaged due to construction activities.
- (c) A shower door shall not leak due to Builder or construction activities.
- (d) Imperfections in a mirror or shower door shall not be visible from a distance of two (2) feet or more when viewed in normal light.
- (e) When opening and closing, a shower door shall operate easily and smoothly without requiring excessive pressure.

(U) PERFORMANCE STANDARDS FOR HARDWARE AND IRONWORK

(1) Performance Standards for Hardware:

- (a) Hardware finishes shall not be tarnished, blemished, corroded, or stained due to construction activities, unless the finish is installed as a specialty feature.
 - i. The Builder is not responsible for tarnished, blemished, or stained hardware finishes that have been damaged by factors that are beyond the manufacturer's or the Builder's control such as the homeowner's use of abrasive pads or cleaners, harsh chemicals, alcohol, organic solvents or deterioration caused by exposure to outdoor elements such as salt air or humidity.
- (b) Hardware shall function properly, without catching, binding, or requiring excessive force to operate.
- (c) Hardware shall not be scratched, chipped, cracked or dented due to construction activities.
- (d) Hardware shall be installed securely and shall not be loose.
 - i. The homeowner shall not exert excessive force on hardware.

(2) Performance Standards for Interior Ironwork:

- (a) Interior ironwork shall not rust.
 - i. The Builder is not responsible for ironwork finishes that rust due to factors that are beyond the manufacturer's or the Builder's control such as the homeowner's use of abrasive pads or cleaners, harsh chemicals, alcohol, organic solvents or deterioration caused by exposure to humidity.

(V) PERFORMANCE STANDARDS FOR COUNTERTOPS AND BACKSPLASHES

(1) Performance Standards for Countertops and Backsplashes Generally:

- (a) A countertop or backsplash shall be secured to substrate in accordance with manufacturer's specifications.
- (b) For non-laminate countertops and backsplashes, the joints between countertop surfaces, between the countertop surface and the backsplash or side-splash and between adjoining backsplash panels may be visible, but shall not separate.
- (c) Countertops shall be level to within 1/4 of an inch in any six (6) foot measurement.
- (d) A countertop surface or edge shall not be damaged, broken, chipped or cracked due to construction activities.
- (e) A countertop shall not bow or warp in an amount equal to or exceeding 1/16 of an inch per lineal foot.

(f) Counter and vanity top material should not delaminate.

(2) Performance Standards for Laminate Countertops and Backsplashes:

- (a) Laminate countertops and backsplashes shall not delaminate and shall remain securely attached to the substrate. Delamination is the separation of the finish surface veneer from the substrate material.
- (b) A seam in a laminate countertop or backsplash may be visible but shall not be separated or displaced.
- (c) A surface imperfection in a laminate countertop or a backsplash shall not be visible from a distance of three (3) feet or more when viewed in normal light due to construction activities.

(W) PERFORMANCE STANDARDS FOR FIREPLACES

(1) Performance Standards for Fireplaces:

- (a) A refractory panel shall not crack or separate.
 - i. The homeowner shall not use synthetic logs or other materials if not approved by the manufacturer.
- (b) A fireplace door shall operate properly. Fireplace doors shall meet evenly and shall not be out of alignment from one another in an amount equal to or exceeding 1/8 of an inch in any direction.
- (c) A fireplace shall not have a gas leak.
- (d) Gas logs shall be positioned in accordance with the manufacturer's specifications.
 - i. The homeowner shall not incorrectly reposition or relocate the logs after the original placement. The homeowner shall not place the logs in a manner that does not allow the flame to flow through the logs according to the manufacturer's specifications.
- (e) A crack in masonry hearth or facing shall not be equal to or exceed 1/4 of an inch in width.
- (f) A fireplace or chimney shall draw properly.
- (g) A firebox shall not have excessive water infiltration under normal weather conditions.
- (h) A fireplace fan shall not exceed the noise level established by the manufacturer's specifications.

(X) PERFORMANCE STANDARDS FOR IRRIGATION SYSTEMS

(1) Performance Standards for Irrigation Systems:

- (a) An irrigation system shall not leak, break or clog due to construction activities or due to soil settlement.
- (b) An irrigation system shall be installed such that sprinkler coverage shall be complete and water shall not spray an unintended area due to construction activities.
- (c) The irrigation system control shall operate in accordance with manufacturer's specifications.
 - i. The Builder shall provide the homeowner with instructions on the operation of the irrigation system at closing.

(Y) PERFORMANCE STANDARDS FOR FENCING

(1) Performance Standards for Fencing:

- (a) A fence shall not fall over and shall not lean in excess of two (2) inches out of plumb due to construction activities.
- (b) A wood fence board shall not be broken due to construction activities. Wood fence boards shall not become detached from the fence due to construction activities of the Builder.
- (c) A masonry unit or mortar in a fence shall not be broken or loose. A crack in a masonry unit shall not occur. A crack in the mortar shall not equal or exceed 1/8 of an inch in width.
- (d) A masonry wall shall have adequate weep holes in the lowest course as required by the Code to allow seepage to pass through the wall.

(Z) PERFORMANCE STANDARDS FOR YARD GRADING

(1) Performance Standards for Yard Grading:

- (a) Yards shall have grades, swales and/or other measures that provide for proper drainage in accordance with the Code, governmental regulations or otherwise in accordance with an applicable drainage and grading plan, if any, and/or approved variations. The homeowner shall maintain the drainage pattern and protect the grading contours from erosion, blockage, over-saturation or any other changes. The possibility of standing water, not immediately adjacent to the foundation but in the yard, after prolonged or an unusually heavy rainfall event should be anticipated by the homeowner. Standing water shall not remain for more than 24 hours within 10 feet of the home after a rain, except in swales that drain other areas or in areas that receive discharge from sump pumps, down spout drain lines, foundation or crawl space drains, etc. In these areas a longer period of standing water can be anticipated but no more than 48 hours. Water may stand longer during periods of heavy rains, especially when heavy rains occur on successive days.
- (b) Settling or sinking of soil shall not interfere with the drainage patterns of the lot or have a vertical depth of six (6) inches or more.

(AA) PERFORMANCE STANDARDS FOR PEST CONTROL

(1) Performance Standards for Pest Control:

- (a) Eave returns, truss blocks, attic vents and roof vent openings shall not allow rodents, birds, and other similar pests into the Home or attic space.



PERFORMANCE STANDARDS FOR ELECTRICAL, PLUMBING, AND MECHANICAL DISTRIBUTION SYSTEMS UNDER THE TWO-YEAR DELIVERY PORTION OF SYSTEMS WARRANTY

This Section describes the Performance Standards for the various Delivery Portion of Systems in a Home as described. Unless otherwise stated under the various Performance Standards herein, if any such Performance Standard is not met, the Builder or GIC (as applicable) shall take such action as is necessary to bring the variance within the standard subject to the terms and conditions herein. The Builder or GIC (as applicable) will repair or replace those elements or components of a Home that do not meet these standards during the applicable warranty period.

(A) PERFORMANCE STANDARDS FOR ELECTRICAL DELIVERY SYSTEMS

(1) Performance Standards for Electrical Wiring:

Electrical wiring installed inside the home shall be installed in accordance with the Code and any other applicable electrical standards and shall function properly from the point of demarcation, as determined by the respective utility. The Builder shall not be responsible for utility improvements from the meter/demarcation point to the utility poles or the transformer.

Electrical wiring shall be capable of carrying the designated load as set forth in the Code. All electrical equipment shall be used for the purposes and/or capacities for which it was designed and in accordance with manufacturer's specifications.

(2) Performance Standards for the Electrical Panel, Breakers, and Fuses:

- (a) The electrical panel and breakers shall have sufficient capacity to provide electrical service to the home during normal residential usage. The Builder shall not be responsible for electrical service interruptions caused by external conditions such as power surges, circuit overloads and electrical shorts.
- (b) The electrical panel and breakers shall have sufficient capacity to provide electrical service to the home during normal residential usage such that a circuit breaker shall not trip and fuses shall not blow repeatedly under normal residential electric usage. The Builder shall not be responsible for circuit breaker trips or blown fuses that have functioned as designed to protect the home from external conditions such as power surges, circuit overloads and shorts.

(3) Performance Standards for Electric Outlets with Ground Fault Interrupters:

- (a) Electrical outlets with ground fault interrupters shall be installed and operate in accordance with the Code and manufacturer's specifications. If ground fault interrupters trip repeatedly under normal residential usage, the Builder shall take such action as is necessary to ensure that the electrical outlets with ground fault interrupters are installed in accordance with the Code and manufacturer's instructions and specifications and that they operate properly during normal residential electrical usage.

The homeowner shall not plug appliances that require constant electrical flow, such as refrigerators and freezers, into an outlet with a ground fault interrupter.

(4) Performance Standards for Fixtures, Outlets, Doorbells and Switches:

- (a) An outlet, doorbell or switch shall be installed in accordance with the manufacturer's specifications and the Code and shall operate properly when installed in accordance with the manufacturer's specifications and the Code.
- (b) A fixture, electrical box or trim plate shall be installed in accordance with the Code and manufacturer's specifications and shall be properly secured to the supporting surface.
- (c) A light shall not dim, flicker, or burn out repeatedly under normal use. A lighting circuit shall meet the Code.

(5) Performance Standards for Wiring or Outlets for Cable Television, Telephone, Ethernet or Other Services:

- (a) Wiring or outlets for cable television, telephone, Ethernet, or other services shall be installed in accordance with the Code and any applicable manufacturer's specifications.
 - i. A Builder shall not be responsible for the failure of wiring or other utility service connectors or conduits that begin before the point at which the service enters the home.
- (b) Wiring or outlets for cable television, telephone, Ethernet, or other services inside the home or on the home side of the meter/demarcation point shall function properly when installed in accordance with the Performance Standards in this subsection.
 - i. A Builder shall not be responsible for the failure of wiring or other utility service connectors or conduits that begin before the point at which the service enters the home.

(B) PERFORMANCE STANDARDS FOR PLUMBING DELIVERY SYSTEMS

(1) Performance Standards for Pipes including Water and Gas Pipes, Sewer and Drain Lines, Fittings and Valves (but not including pipes included in a Landscape Irrigation System):

- (a) Pipes shall be installed and insulated in accordance with the Code and manufacturer's specifications.
 - i. If a water pipe bursts, the Builder shall take such action as is necessary to bring the variance within the standard stated in this subsection.
 - ii. The homeowner shall be responsible for insulating and protecting exterior pipes and hose bibs from freezing weather and for maintaining a reasonable temperature in the home during periods of extremely cold weather. The homeowner shall be responsible for maintaining a reasonable internal temperature in a home regardless of whether the home is occupied or unoccupied and for periodically checking to ensure that a reasonable internal temperature is maintained.
 - iii. A water pipe shall not leak.
 - iv. The homeowner shall shut off water supply immediately if such is required to prevent further damage to the home.
- (b) A gas pipe shall not leak, including natural gas, propane, or butane gas.
 - i. If a gas pipe is leaking, the homeowner shall shut off the source of the gas if the homeowner can do so safely.

- (c) Water pressure shall not exceed 80 pounds per square inch in any part of the water supply system located inside the home. Minimum static pressure at the building entrance for either public or private water service shall be 40 pounds per square inch in any part of the water supply system.
 - i. This standard assumes the public or community water supply reaches the home side of the meter at 40 pounds per square inch. The Builder is not responsible for water pressure variations originating from the water supply source.
 - (d) A sewer, drain, or waste pipe shall not become clogged or stopped up due to construction activities.
 - i. The Builder shall take such action as is necessary to unclog a sewer, drain or waste pipe that is clogged or stopped up due to construction activities.
 - ii. The homeowner shall shut off water supply immediately if such is required to prevent damage to the home.
 - (e) Coverage under this subsection (B)(1) is limited to repair or replacement of the pipe itself. The coverage includes repair or replace of any surface necessarily damaged in accessing the pipe.
 - (f) Coverage does not include repair or replacement of any non-load bearing portions, items, systems, surfaces, finishes, or coverings damaged or affected by a Warranted defect covered under this subsection (B)(1).
 - (g) Any Major Structural Defect resulting, arising, or in any way stemming from an element that fails to meet this performance standard is excluded from warranty coverage as set forth in Section 7 of this Warranty.
- (2) Performance Standards for Individual Wastewater Treatment Systems.
- (a) A wastewater treatment system should be capable of properly handling normal flow of household effluent in accordance with the Texas Commission on Environmental Quality requirements. The Builder shall take such action as is necessary for the wastewater treatment system to perform within the standard stated in this subsection.
 - (b) The Builder shall not be responsible for:
 - i. A system malfunctions or is damaged due to the addition of a fixture, equipment, appliance or other source of waste or water into the septic system by a person other than the Builder or a person working at the Builder's direction; or
 - ii. Malfunctions or limitations in the operation of the system attributed to a design restriction imposed by state, county, or local governing agencies; or
 - iii. Malfunctions caused by freezing, soil saturation, soil conditions, changes in ground water table or any other acts of nature.

(C) PERFORMANCE STANDARDS FOR HEATING, AIR CONDITIONING AND VENTILATION DELIVERY SYSTEMS

Please note that the party responsible for the costs of parts and/or labor may depend on the Manufacturer's product agreement.

- (1) Performance Standards for Air Conditioning:
 - (a) A refrigerant line shall not leak.
 - i. Condensation on a refrigerant line is not a leak.

(2) Performance Standards for Heating and Cooling Functions:

- (a) A heating system shall produce an inside temperature of at least 68-degrees Fahrenheit as measured two (2) feet from the outside wall of a room at a height of three (3) feet above the floor under local outdoor winter design conditions as specified in the Code.
 - i. Temperatures may vary up to 4-degrees Fahrenheit between rooms but no less than the standard set forth in this subsection. The homeowner's changes made to the size or configuration of the home, the heating system or the ductwork shall negate the Builder's responsibility to take measures to meet this Performance Standard.
- (b) An air-conditioner system shall produce an inside temperature of at most 78-degrees Fahrenheit as measured in the center of a room at height of five (5) feet above the floor, under local outdoor summer design conditions as specified in the Code (In the case of outside temperatures exceeding 98 degrees Fahrenheit, the system shall keep the inside temperature 20 degrees cooler than the outside temperature.)
 - i. This standard does not apply to evaporative or other alternative cooling systems or if the homeowner makes changes to the size or configuration of the home, the air-conditioning system, or the ductwork. Internal temperatures may vary up to 4-degrees Fahrenheit between rooms but no more than the standard set forth in this subsection. If the homeowner modifies or changes the size or configuration of the system or the square footage associated with the property or dwelling, the cooling system or the ductwork, it shall negate the Builder's responsibility to take measures to meet this performance standard.
- (c) A thermostat reading shall not differ by more than 4-degrees Fahrenheit from the actual room temperature taken at a height of five (5) feet above the floor in the center of the room where the thermostat is located. The stated Performance Standard is related to the accuracy of the thermostat and not to the Performance Standard of the room temperature.
- (d) Heating and cooling equipment shall be installed and secured according to the manufacturer's instructions and specifications and shall not move excessively.

(3) Performance Standards for Vents, Grills or Registers:

- (a) A vent, grill or register shall operate easily and smoothly when applying normal operating pressure. If a vent, grill or register does not operate easily and smoothly when applying normal pressure when adjusting, the Builder shall repair the vent, grill or register so that it operates with ease of use when applying normal operating pressure.
- (b) A vent, grill or register shall be installed in accordance with the Code and manufacturer's instructions and specifications and shall be secured to the underlying surface.

(4) Performance Standards for Ductwork:

- (a) Ductwork shall be insulated in unconditioned areas in accordance with the Code.
- (b) Ductwork shall be secured according to the manufacturer's instructions and specifications and it shall not move excessively.
- (c) Ductwork shall be sealed and shall not separate or leak in excess of the standards set by the Code.



PERFORMANCE STANDARDS FOR MAJOR STRUCTURAL COMPONENTS UNDER THE 10-YEAR STRUCTURAL DEFECT WARRANTY

This Section describes the Performance Standards for the various Structural Components of a Home as described in Section 10. Subject to the applicable exclusions, GIC will repair or replace those elements or components of a Home that do not meet these standards during the applicable warranty period.

(A) PERFORMANCE STANDARDS FOR SLAB-ON-GROUND FOUNDATIONS

- (1) Slab-on-ground foundations should not move differentially after they are constructed, such that a tilt or deflection in the slab in excess of the standards defined below arises from actual post-construction movement. The protocol and standards for evaluating slab-on-ground foundations shall follow generally provisions of the ASCE Guidelines with the following modifications:
 - (a) Overall deflection from original construction shall be no greater than the overall length over which the deflection occurs divided by 360 ($L/360$) and must not have more than one associated symptom of distress, as described in Section 5 of the ASCE Guidelines, and that results in actual observable physical damage to the Home. L shall be defined as the edge to edge distance across any slab cross-section for which overall deflection is calculated, but the minimum L shall be not less than 25 feet. Calculations of overall deflection shall be based upon the change in elevation at each point for which an Original Construction Elevation was taken. A deflection analysis must be based upon a minimum of three co-planar relative elevation data points – two end points that form a straight reference line along the evaluated section and a third point anywhere along the deformed surface that reflects a deviation of the foundation surface from the reference line. The distance from the deformed surface to the reference line shall be measured perpendicularly to the reference line.
 - (b) The slab shall not tilt after construction in excess of one (1) percent across any edge-to-edge dimension of the Home or cause structural component(s) or masonry veneer to rotate into a structurally unstable position such that the weight vector of the component part falls outside the middle third of its bearing area. Calculations of overall tilt shall be based upon the change in elevation at the respective edge for which an Original Construction Elevation was taken.
- (2) If measurements and associated symptoms of distress show that a slab foundation does not meet the deflection or tilt standards stated in this subsection, the recommendations of a Texas licensed Professional Engineer shall be implemented, which shall be based on the appropriate remedial measures as described in Section 7 of the ASCE Guidelines. Localized measurements of deflection that are claimed to be outside of performance standards, Code or tolerances are not warranted and there is no responsibility for correction or otherwise. By definition, tilt is a global mechanism of planar rotation across the entire foundation, edge-to-edge; therefore, local tilt does not exist and cannot be analyzed.

(B) PERFORMANCE STANDARDS FOR RAISED-FLOOR FOUNDATIONS (I.E. PIER-AND-BEAM, ELEVATED CONCRETE SLABS ON FORMS, ETC.).

- (1) Raised-floor foundations should not move differentially after they are constructed, such that a tilt or deflection in the floor surface in excess of the standards defined below arises from actual post-construction movement. The protocol and standards for evaluating raised-floor foundations shall follow the ASCE Guidelines with the following modifications:

- (a) A raised-floor foundation shall not deflect more than $L/360$ from original construction and have that movement create actual observable physical damage to the components of the Home identifiable in Section 5.3 of the ASCE Guidelines. L shall be defined as the edge-to-edge distance across any foundation cross-section for which overall deflection is calculated. Calculations of overall deflection shall be based upon the change in elevation at each point for which an Original Construction Elevation was taken. A deflection analysis must be based upon a minimum of three co-planar relative elevation data points – two end points that form a straight reference line along the evaluated section and a third point anywhere along the deformed surface that reflects a deviation of the floor surface from the reference line. The distance from the deformed surface to the reference line shall be measured perpendicular to the reference line.
 - (b) A raised-floor foundation shall not tilt after construction in excess of one percent across any edge-to-edge dimension of the Improvements or cause structural component(s) or masonry veneer to rotate into a structurally unstable position such that the weight vector of the component part falls outside the middle third of its bearing area. Calculations of overall tilt shall be based upon the change in elevation at the respective perimeter points for which an Original Construction Elevation was taken.
 - (c) If a raised-floor foundation deflects more than $L/360$ from its original construction elevation and the movement has created actual observable physical damage to the components of a home identifiable in Section 5.3 of the ASCE Guidelines, the recommendations of a Texas licensed Professional Engineer shall be implemented, which shall be based on applicable remedial measures as described in Section 7 of the ASCE Guidelines.
- (2) If measurements and associated symptoms of distress show that a raised floor foundation does not meet the deflection or tilt standards stated in paragraph (1) of this subsection, recommendations of a Texas licensed professional engineer shall be implemented, which shall be based on the appropriate remedial measures as described in Section 7 of the ASCE Guidelines. Localized measurements of deflection that are claimed to be outside of performance standards, Code or tolerances are not warranted and there is no responsibility for correction or otherwise. Attempted measurements of tilt in which L is not an edge-to-edge distance across the foundation cross-section are actually measurements of localized slopes, not tilt, which are not warranted, and there is no responsibility for correction or otherwise.

(C) MAJOR STRUCTURAL COMPONENTS OTHER THAN SLAB-ON-GROUND FOUNDATIONS AND RAISED FLOOR FOUNDATIONS

- (1) A defined structural component, other than the concrete elements of a slab-on-ground foundation or a raised floor foundation, shall not crack, bow, become distorted or deteriorate, such that it compromises the structural integrity of the Home or the performance of a structural system of the Home resulting in actual observable physical damage to a component of the Home.
- (2) If a structural component of the Home, other than the concrete elements of a slab-on-ground foundation or a raised floor foundation, cracks, bows, is distorted or deteriorates such that it results in actual observable physical damage to a component of the Home, such action shall be taken as is necessary to repair, reinforce or replace such structural component to restore the structural integrity of the Home or the performance of the affected structural system.
- (3) Deflected structural components.

- (a) A structural component, other than the foundation, shall not deflect more than the ratios allowed by The Code.
 - (b) If a structural component of the home, other than the foundation, is deflected more than the ratios allowed by the Code, then such action shall be to repair, reinforce or replace such structural component to restore the structural integrity of the home or the performance of the affected structural system.
- (4) Damaged structural components.
 - (a) A structural component, other than the foundation, shall not be so damaged that it compromises the structural integrity or performance of the affected structural system.
 - (b) If a structural component, other than the foundation, is so damaged that it compromises the structural integrity or performance of a structural system of the Home, such action shall be taken as is necessary to repair, reinforce or replace such structural component to restore the structural integrity of the Home or the performance of the affected structural system.
- (5) Separated structural components.
 - (a) A structural component, other than the foundation, shall not separate from a supporting member more than 3/4 of an inch or such that it compromises the structural integrity or performance of the system.
 - (b) If a structural component, other than the foundation, is separated from a supporting member more than 3/4 of an inch or separated such that it compromises the structural integrity or performance of a structural system of the Home, the such action shall be taken as necessary to repair, reinforce or replace such structural component to re-establish the connection between the structural component and the supporting member, to restore the structural integrity of the Home and the performance of the affected structural system.
- (6) Non-performing structural components:
 - (a) A structural component, other than the foundation, shall function as required by the Code.

An electronic version of this form can be downloaded at:
https://www.strucsure.com/downloads/SHW_Workmanship_Claim_Form_Fillable.pdf



StrucSure
HOME WARRANTY

6825 E. Tennessee Ave., Suite #410 • Denver, CO 80224
 Ph: 1.877.806.8777 • Fax: 303.806.9897 | E-Mail: claims@strucsure.com | www.strucsure.com

WORKMANSHIP, MATERIALS OR SYSTEMS WARRANTY SERVICE REQUEST FORM

Before completing this form, you must report the alleged defect(s) to your builder first and provide them a reasonable opportunity to address the issue(s). If unsuccessful, fill out this form completely, sign it and attach complete written details of the defect(s) that form the basis of your service request. Be specific and include copies of any documents, pictures and any information you provided to your builder. **Please note that a non-refundable warranty service fee may be required.**

Mail OR E-mail to StrucSure at the address above. Keep a copy of all papers for your file.

BUILDER NAME: _____ CERTIFICATE NUMBER: _____
 HOMEOWNER NAME: _____
 ADDRESS: _____ CITY: _____
 SUBDIVISION: _____ STATE: _____ ZIP: _____
 HOME PHONE: _____ WORK PHONE: _____ CELL PHONE: _____
 E-MAIL ADDRESS: _____

CLAIM INFORMATION

1. DATE YOU FIRST NOTICED THE ALLEGED DEFECT(S): _____
2. DATE YOU REPORTED THE ALLEGED DEFECT(S) TO THE BUILDER: _____
3. HAS THE BUILDER ATTEMPTED TO CORRECT THE DEFECT(S)? YES _____ NO _____
 IF YES, HOW MANY PREVIOUS ATTEMPTS HAS THE BUILDER MADE? _____
4. HAVE YOU REVIEWED THE WARRANTY COVERAGE PROVISIONS? YES _____ NO _____

Itemize defects and/or issues: _____

SUBMITTED BY: _____ DATE: _____
PRINT NAME

SIGNATURE: _____

REMINDER: ATTACH INFORMATION DETAILING ALLEGED DEFECT(S).

If necessary, we may contact you for more information. A non-refundable warranty service fee may be required to complete your claim submission process.

A person who knowingly submits fraudulent information is guilty of a crime.

An electronic version of this form can be downloaded at:
https://www.strucsure.com/downloads/SHW_Structural_Claim_Form_Fillable.pdf



StrucSure

HOME WARRANTY

6825 E. Tennessee Ave., Suite #410 • Denver, CO 80224

Ph: 1.877.806.8777 • Fax: 303.806.9897 | E-Mail: claims@strucsure.com | www.strucsure.com

MAJOR STRUCTURAL DEFECT WARRANTY CLAIM FORM

Fill out this form completely, sign it and attach complete written details of the alleged defect(s) that form the basis of your claim. Be specific and include copies of any documents, pictures and any information you provided to your builder.

Mail OR E-mail to StrucSure at the address above. Keep a copy of all papers for your file.

BUILDER NAME: _____ CERTIFICATE NUMBER: _____

HOMEOWNER NAME: _____

ADDRESS: _____ CITY: _____

SUBDIVISION: _____ STATE: _____ ZIP: _____

HOME PHONE: _____ WORK PHONE: _____ CELL PHONE: _____

E-MAIL ADDRESS: _____

CLAIM INFORMATION

1. Please describe the nature of the Defect as accurately and specifically as possible (if necessary, attach a separate sheet of paper): _____

2. Date you first noticed the alleged structural defect: _____

3. Have you read the warranty book on how to make a structural claim? YES _____ NO _____

4. Do you think the alleged defect renders the house unlivable? YES _____ NO _____

5. Have you obtained an engineer's evaluation and/or have pictures regarding the alleged structural defect(s)? *If yes, attach the evaluation and/or pictures.* YES _____ NO _____

6. Have you installed and/or put in place any new improvements to the home that may prohibit or inhibit the repairs to the alleged structural defect(s)? *If yes, attach details.* YES _____ NO _____

7. Have any previous repairs been performed by you or someone under your direction? YES _____ NO _____
If yes, attach complete details and describe the nature of the repairs and who made them.

SUBMITTED BY: _____ DATE: _____
 PRINT NAME

SIGNATURE: _____

Please note that the total claim and repair process may take 60 days to complete. If necessary, we may contact you for more information. A person who knowingly submits a fraudulent claim is guilty of a crime.

ACCESSING YOUR WARRANTY DOCUMENTS AND HOMEOWNER RESOURCES



To view, print, and/or download your Warranty Booklet and Certificate of Warranty Coverage, please visit StrucSure's online portal at warranty.strucsure.com.



To learn more about the many benefits our warranty coverage offers, please visit www.strucsure.com/homeowners.



If you are unable to access your warranty documents via our portal or need documents mailed to you because you don't have access to a computer, please call us at **1.877.806.8777**.



For home maintenance tips and recommended guidelines, access our Homeowner Maintenance Manual at the following URL, or scan the QR code below:
www.strucsure.com/SHW-HOMM.pdf



StrucSure
HOME WARRANTY

StrucSure Home Warranty

6825 E Tennessee Ave, Suite 410

Denver, CO 80224

877.806.8777 (office toll-free)

877.906.0222 (fax)

www.strucsure.com

info@strucsure.com